

FORCE **SIoux**™ TOOLS



FOR THE WAY YOU WORK



SIoux
TOOLS INC.

MISSION

To create and serve customers with quality products and service that meet or exceed their expectations.

HISTORY

A History of Success

Sioux Tools has a long and proud heritage of innovation as they have helped to shape the face of the tool industry. The company was started in November of 1914 by Swedish tool maker, Oscar Albertson, and office boy, Harold Jacobson, with a goal to become the "best machine and tool shop". Sioux has since grown to become a trusted partner by a wide range of industrial and manufacturing segments.

Originally named Albertson & Company, the first items manufactured were piston rings, spark plugs and a gas saver. They soon expanded their line to become a powerful force in the marketplace. In early 1917, Oscar Albertson designed a valve lathe- a hand tool used to seat engine valves. This invention proved to be the foundation upon which Sioux Tools has built a reputation for innovation throughout the world.

During the 1920s the company revolutionized the tool industry by introducing some of the very first hand held power tools. In 1958 the company further solidified its position as a market leader by designing and producing its first air powered tools. Today, Sioux Tools has been granted well over 100 patents. Innovation, ingenuity and insight have established Sioux tools in the minds of the professional as the tool to depend on. Our commitment to continued development in ergonomics and innovative design ensures that we will meet the needs of professionals for many years to come.

Wherever there are markets for quality-built, reliable products, backed by strong after-sale dedication to customer satisfaction, you'll find Sioux Tools. Today we continue to strive to live up to our founding father's wish of being the "best in the world".

In 1994 Sioux Tools joined Snap-on Incorporated, which added industrial power tools to the extensive Snap-on line. Snap-on Incorporated is a leading global developer, manufacturer and marketer of tool and equipment solutions for professional tool users. Product lines include hand and power tools, diagnostics and shop equipment, tool storage products, diagnostics software and other solutions for the transportation service, industrial, government, education, agricultural, and other commercial applications, including construction and electrical. Founded in 1920, Snap-on is a \$2+ billion, S&P 500 company headquartered in Kenosha, Wisconsin and employs approximately 14,000 worldwide.

COMMITTED

Committed to your success

For nearly 90 years, Sioux Tools has been providing tools that have been designed and built by the best engineers in the country. We use only top-quality materials in our manufacturing process, and we offer the strongest support and warranty in the business. Our over 100 patents are an indication of our innovation in product development and design.

Sioux Tools are built tough to provide you with many years of trouble-free service. But as with any piece of equipment, service problems can occur, thus Sioux tools are designed to make servicing quick, easy and affordable.

To help ensure fast repairs, which in turn limit downtime, Sioux Tools offers training seminars that cover all the details of the tools we make. For information on our training program, please contact your local Sioux Tools representative.





| | |
|------------------------------------|----------------|
| DRILLS | 7 |
| PISTOL GRIP | 9 |
| INLINE | 10 |
| RIGHT ANGLE | 10 |
| DRILL ACCESSORIES | 10 |
| ASSEMBLY | 11 |
| RATCHET WRENCHES | 13 |
| 3/8" (10 mm) IMPACT WRENCHES | 14 - 15 |
| 1/2" (13 mm) IMPACT WRENCHES | 15 - 16 |
| 3/4" (19 mm) IMPACT WRENCHES | 16 - 17 |
| 1" (25 mm) IMPACT WRENCHES | 17 - 18 |
| ASSEMBLY ACCESSORIES | 18 |
| ABRASIVE | 19 |
| STRAIGHT DIE GRINDERS | 21 |
| RIGHT ANGLE DIE GRINDERS | 22 |
| FINISHING | 23 |
| SANDERS | 25 |
| POLISHERS | 25 |
| FINISHING ACCESSORIES | 26 - 27 |
| PERCUSSIVE | 29 |
| HAMMERS | 31 |
| SCALERS | 31 |
| PERCUSSIVE ACCESSORIES | 32 |
| SPECIALTY | 33 |
| RECIPROCATING AIR SAW | 35 |
| AIR ENGRAVING PEN | 35 |
| CUT-OFF TOOL | 35 |
| GENERAL ACCESSORIES | 36 - 37 |
| CONVERSION CHART | 40 |



| MODEL NUMBER | PAGE | MODEL NUMBER | PAGE |
|---------------------|-------------|---------------------|-------------|
| 5000A | .15 | 5266 | .31 |
| 5000AL | .15 | 5268 | .22 |
| 5000AP | .15 | 5272A | .31 |
| 5007 | .13 | 5273A | .31 |
| 5009 | .13 | 5274A | .31 |
| 5011 | .13 | 5285 | .22 |
| 5013 | .13 | 5287A | .25 |
| 5035 | .14 | 5300A | .35 |
| 5035P | .14 | 5338A | .15 |
| 5038B | .14 | 5338AP | .15 |
| 5039B | .14 | 5350A | .16 |
| 5045 | .14 | 5350AP | .16 |
| 5045P | .14 | 5375A | .17 |
| 5050A | .16 | 5375AP | .17 |
| 5051A | .16 | 5430KL | .10 |
| 5053A | .21 | 5434 | .10 |
| 5054A | .21 | 5434KL | .10 |
| 5055A | .22 | 5440KL | .9 |
| 5056 | .22 | 5445R | .9 |
| 5075A | .16 | 5445RKL | .9 |
| 5075AL | .16 | 5450R | .9 |
| 5092 | .17 | 5450RKL | .9 |
| 5092L | .17 | 5540 | .25 |
| 5093 | .17 | 5558A | .25 |
| 5093L | .17 | 5560 | .25 |
| 5095 | .18 | 5564A | .35 |
| 5095L | .18 | 5977 | .21 |
| 5238A | .25 | 5978A | .21 |
| 5250A | .15 | 5979A | .21 |
| 5262 | .31 | 5980 | .35 |
| 5263 | .31 | FDR5430 | .10 |
| 5265 | .25 | FDR5440 | .9 |



SIoux TOOLS, INC. POWER TOOLS WARRANTY

Except as otherwise provided herein, Sioux Tools Inc. warrants the product for 1 year from the date of original purchase against defects in workmanship and materials that prevent their use. Consumable parts are warranted, at the time of sale, against defects in workmanship and materials that prevent their use. Consumable parts are goods reasonably expected to be used up or damaged during use, including but not limited to, cables, sensors and batteries. This warrantee only extends to the original Buyer and cannot be transferred or assigned.

In the event the product fails to give satisfactory service due to a defect in materials or workmanship during the specified warranty period, at its option, Sioux Tools Inc. will repair or replace the product or provide a refund by repaying or crediting the Buyer with an amount equal to the purchase price of the product. Repair, replacement or refund shall be at the sole election and expense of Sioux Tools Inc. and is Buyer's exclusive remedy in place of all other rights and remedies. To obtain warrantee service, contact Sioux Tools Inc. or a Sioux Tools Inc. representative or distributor. Proof of purchase must be provided with all warranty service requests. By repairing or replacing the product, or providing a refund, Sioux Tools Inc. does not waive a claim that the product nevertheless has been subject to abnormal use.

Sioux Tools Inc. does not provide any warrantee for (i) recalibration; or (ii) product subject to "abnormal use". "Abnormal use" includes misuse, accident, modification, alteration, unreasonable or improper use, abuse, neglect, lack of maintenance, use in product related service, or use after the product is significantly worn. Further, this Warrantee DOES NOT cover any damage to, or in operability or improper operation of the product caused by, resulting from or attributable to (1) installation or maintenance; (2) fire, water, wind, lightning or other natural causes; (3) damaged caused by adverse environmental conditions, including without limitation, extreme temperatures, moisture, corrosive elements, dust or other air contaminants, radio frequency interference, electric power failure, power line voltages beyond those specified for the product, unusual physical, electrical or electromagnetic stress and/or other condition outside of Sioux Tools Inc. environmental specifications; (4) use of the product in combination or connection with other product, attachments, supplies or consumables not manufactured or distributed by Sioux Tools Inc.; or (5) failure to comply with any applicable federal, state or local regulation, requirement or specification governing emission analyzers and related supplies or consumables. Parts and labor needed to maintain your product and any replacement parts necessary do to normal wear and tear are not covered by this written warrantee and are the Buyer's responsibility.

THE FOREGOING WARANTEE IS IN LIEU OF AND EXCLUDES ALL OTHER WARANTEES NOT EXPRESSLY SET FORTH HEREIN, WETHER EXPRESS OR IMPLIED BY OPERATION OF LAW OR OTHERWISE, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARANTEES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND SETS FORTH THE SOLE AND EXCLUSIVE REMEDY IN CONTRACT, TORT, STRICT LIABILITY OR OTHERWISE. SIoux TOOLS INC. DOES NOT GRANT ANY OTHER PERSON OR ENTITY PERMISSION TO CREATE FOR IT ANY WARANTEE, LIABILITY OR OBLIGATION IN CONNECTION WITH ITS PRODUCTS.

Sioux Tools Inc. shall not be liable for any incidental, special or consequential losses, costs or damages incurred by Buyer or others, directly or indirectly arising from the sale, handling or use of the products, or from any other cause with respect to the products or this warrantee, whether such claim is based upon breach of contract, breach of warrantee, strict liability in tort, negligence or any other legal theory (including without limitation, lost profits, revenues, anticipated sales, businesses opportunities, good will, or interruption of business or other injury or damage).

To the extent allowed by applicable law, this warrantee and all rights and obligations hereunder, including matters of construction, validity and performance, shall be governed by the substantive laws of the state of Wisconsin, without giving effect to the principles of conflicts of law thereof.

ISO 9001

In 1997 Sioux Tools received its ISO 9001 certification. This certification is essential to doing business in today's global marketplace. It affirms our dedication to quality and our continued commitment to improvement. It assures our customers that the products they purchase will consistently live up to the promise of performance. It also validates our target goal of achieving maximum quality in every stage of the process — from the initial concept and development all the way through the delivery of spare parts. Our customers can be certain that Sioux tools will live up to their high expectations and provide a long, trouble-free life.





CATALOG GUIDE

Color-coded Tabs

Quick reference indicator to locate a particular section

Product Description

Instant reference to the type of tools displayed

Photos

Visual reference of selective models

Features

List of significant features common to all items

Safety Info

A brief reminder of safety when operating industrial power tools

SIOUX TOOLS FORCE PRODUCT CATALOG | DRILLS

PISTOL GRIP DRILLS
INLINE AIR DRILLS



3/8" (10 mm) Drill

Model No. 5445RKL

- Keyless chuck
- Reversible
- Aluminum housing
- Chuck capacity 3/8" (10 mm)
- Free speed: 1800 rpm
- Weight: 3.0 lb (1.4 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)



1/2" (13 mm) Drill

Model No. 5450R

- Keyed chuck
- Reversible
- Aluminum housing
- Support handle
- Free speed: 550 rpm
- Chuck capacity: 1/2" (13 mm)
- Weight: 4.3 lb (1.95 kg)
- Length: 9.25" (235 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)



3/8" (10 mm) Drill

Model No. 5445R

- Keyed chuck
- Reversible
- Aluminum housing
- Chuck capacity 3/8" (10 mm)
- Free speed: 1800 rpm
- Weight: 3.0 lb (1.4 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)



3/8" (10 mm) Inline Air Drill

Model No. 5434

- Keyed Chuck
- Non-Reversible
- Aluminum housing
- Lockoff level throttle
- Rear exhaust
- Built-in speed regulator
- Free speed: 2500 rpm
- Chuck capacity: 3/8" (10 mm)
- Weight: 2.0 lb (0.9 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)



3/8" (10 mm) Drill

Model No. 5440KL

- Keyless chuck
- Non-reversible
- Aluminum housing
- Chuck capacity: 3/8" (10 mm)
- Free speed: 2300 rpm
- Weight: 2.1 lb (1.0 kg)
- Length: 7.5" (190 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)



3/8" (10 mm) Inline Air Drill

Model No. 5434KL

- Keyless Chuck
- Non-Reversible
- Aluminum housing
- Lockoff level throttle
- Rear exhaust
- Built-in speed regulator
- Chuck capacity: 3/8" (10 mm)
- Free speed: 2500 rpm
- Weight: 2.0 lb (0.9 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



CATALOG GUIDE

Standard Equipment

Under this heading a specification is given for each type of tool and of the parts (nipples, keys, guards, etc.) supplied with the tool.

A parts list and safety and instruction manual are always included in the package with every tool.

Air consumption

The air consumption of the tools is stated in cubic feet per minute (cfm) and liters per second, l/s, and relates to free air, i.e., the compressed air expanded to atmospheric pressure. Unless otherwise stated, the figures are valid at a working pressure of 90 psig (6.2 bar) and indicate the maximum air consumption unless otherwise stated.

Maximum air consumption for non-governed tools is achieved at free speed when the tool is running at no load. A tool with governed speed control has the maximum air consumption at the maximum power output.

Speed

The tool speeds are indicated in revolutions per minute, (rpm), and indicate the free speed, i.e., the speed at which the tool runs at no load and at a working pressure of 90 psig (6.2 bar), unless otherwise specified. The speed at maximum output is estimated as 50% of the idling speed for non-governed tools and 80-90% of the idling speed for tools with governed speed control.

Weight and Length

The weight of the tools are listed in both pounds (lb) and kilograms (kg), and the length is listed in both inches (in) and millimeters (mm).

Side to Center

This measurement is taken from the center of the tool to the outside edge. It is useful for applications requiring the tool to fit into a precise or limited space.

Quick Conversion Chart

Length

| | | |
|-------|---|-------------|
| 1 in. | = | 0.0254 m |
| 1 m | = | 39.3701 in. |
| 1 m | = | 3.2808 ft |
| 1 in. | = | 25.4 mm |
| 1 ft | = | 304.8 mm |
| 1 mm | = | 0.03937 in. |

Weight

| | | |
|------|---|-----------|
| 1 lb | = | 0.4536 kg |
| 1 kg | = | 2.2046 lb |

Torque

| | | |
|----------|---|--------------|
| 1 kpm | = | 9.8067 Nm |
| 1 ft lb | = | 1.3558 Nm |
| 1 in. lb | = | 0.1130 Nm |
| 1 Nm | = | 0.1020 kpm |
| 1 Nm | = | 0.7376 ft lb |

Pressure

| | | |
|---------------------------|---|-----------------------------------|
| 1 bar | = | 100 kPa |
| 1 kg/cm ² (at) | = | 98.0665 kPa |
| 1 psi | = | 6.8948 kPa |
| 1 kPa | = | 0.145 psi |
| 1 kPa | = | 0.01 bar |
| 1 kPa | = | 0.0101972 kg/cm ² (at) |

Power

| | | |
|---------|---|---------------|
| 1 kgm/s | = | 9.8067 w |
| 1 hp | = | 745.7 w |
| 1 kw | = | 101.972 kgm/s |
| 1 kw | = | 1.3410 hp |

Flow

| | | |
|-----------------------|---|-------------|
| 1 m ³ /min | = | 16.6667 l/s |
| 1 cfm | = | 0.4720 l/s |
| 1 m ³ /h | = | 0.2778 l/s |
| 1 l/s | = | 2.1189 cfm |



FORCE TOOLS

The Force of the Tool Industry

Sioux Tools is known around the world for quality, durability and performance. Our extensive and always expanding line of industrial power tools are engineered to make any job easier, safer and more efficient. We build tools that stand up to the demanding specifications required by today's industrial manufacturing, assembly and finishing needs.

Force

Sioux Tools designs the tool to fit the application. Many businesses require tools that can deliver high performance but are not subject to the constant demands of industrial applications. To meet these requirements, Sioux developed the Force line. The Force lineup is designed primarily for the MRO (Maintenance Repair Operations) and manufacturing support functions, however, the quality of these tools will allow them to go beyond these typical support applications to fit the bill in many of your manufacturing processes.

Force tools are designed to complement the durability and performance of our industrial line. Check out the following line of Force tools in this catalog.

Drills

Sanders

Impact Wrenches

Polishers

Impact Drivers

Hammers & Scalers

Ratchet Wrenches

Reciprocating Saw

Grinders

Cut-off Tool





Drills Index

| | |
|-------------------------|----|
| Pistol Grip..... | 9 |
| Inline..... | 10 |
| Right Angle | 10 |
| Drill Accessories | 10 |



We Take On Any Job... Bit By Bit

Industry Leader


Regarded as the Number 1 choice in the industry, Sioux Tools' pneumatic drills are known around the world for their exceptional engineering and construction. A wide range of configurations, speeds, and options ensure a perfect match for any application. Choose from pistol grip, inline and right angle designs that will help you get the job done fast and efficiently. Sioux also offers a complete line of accessories including a huge section of hole saws.

Designed to work

Sioux Tools offers one of the widest selections of drills on the market today. With free speeds from 550 to 2,500 rpm we have the right drill for any application, for use with any type material. The gears are designed and built tough to handle demanding jobs, yet even under load, operate quietly and efficiently. Sioux drills come in both reverse and non-reverse models.

Ergonomics

All Sioux Drills offer ergonomic features to provide maximum comfort during operation. Many models include comfortable insulating grips to reduce cold and vibration. Due to the high torque output, model 5450R includes a auxiliary support handle for more control.

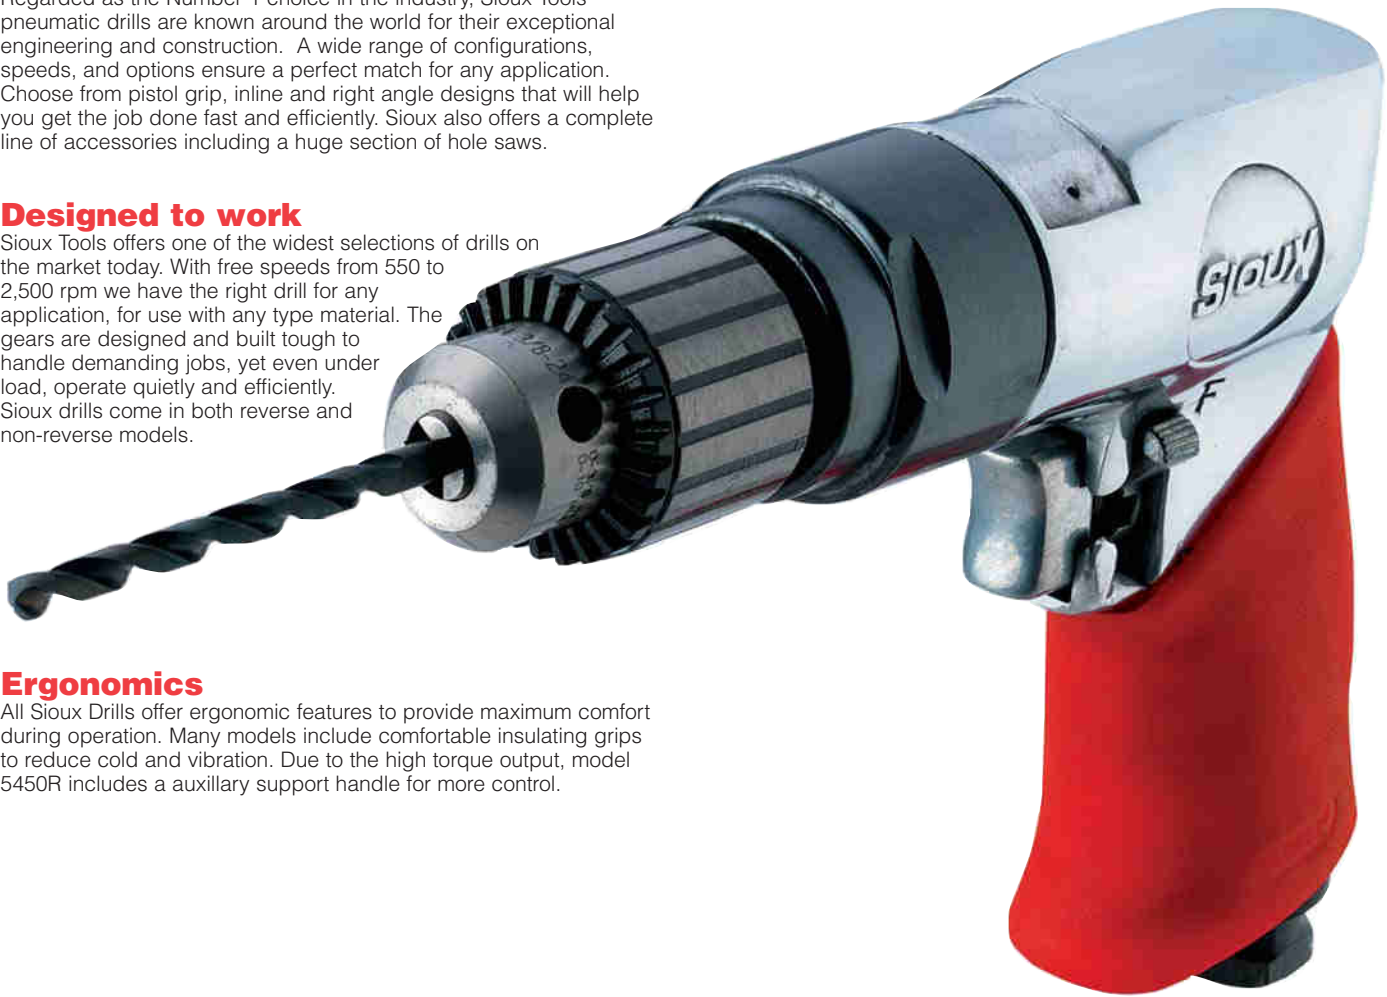



3/8" (10 mm) Drill

Model No. FDR5440

- Keyed chuck
- Non-reversible
- Aluminum housing
- Chuck capacity: 3/8" (10 mm)
- Free speed: 2300 rpm
- Weight: 2.1 lb (1.0 kg)
- Length: 7.9" (190 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 3/8" - 24 Spindle thread

CE




3/8" (10 mm) Drill

Model No. 5445RKL

- Keyless chuck
- Reversible
- Aluminum housing
- Chuck capacity 3/8" (10 mm)
- Free speed: 1800 rpm
- Weight: 3.0 lb (1.4 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 3/8" - 24 Spindle thread

CE

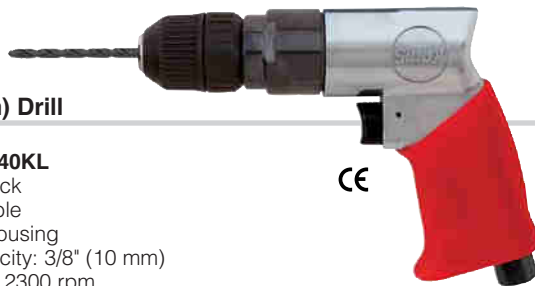

3/8" (10 mm) Drill

Model No. 5440KL

- Keyless chuck
- Non-reversible
- Aluminum housing
- Chuck capacity: 3/8" (10 mm)
- Free speed: 2300 rpm
- Weight: 2.1 lb (1.0 kg)
- Length: 7.5" (190 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 3/8" - 24 Spindle thread

CE




1/2" (13 mm) Drill

Model No. 5450R

- Keyed chuck
- Reversible
- Aluminum housing
- Support handle
- Free speed: 550 rpm
- Chuck capacity: 1/2" (13 mm)
- Weight: 4.3 lb (1.95 kg)
- Length: 9.25" (235 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 1/2" - 20 Spindle thread

CE

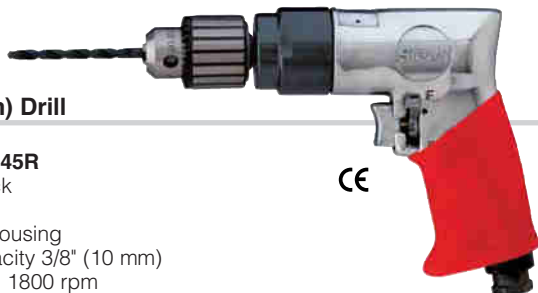


3/8" (10 mm) Drill

Model No. 5445R

- Keyed chuck
- Reversible
- Aluminum housing
- Chuck capacity 3/8" (10 mm)
- Free speed: 1800 rpm
- Weight: 3.0 lb (1.4 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 3/8" - 24 Spindle thread

CE

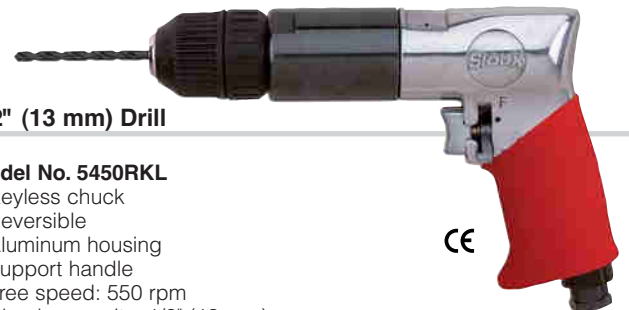

1/2" (13 mm) Drill

Model No. 5450RKL

- Keyless chuck
- Reversible
- Aluminum housing
- Support handle
- Free speed: 550 rpm
- Chuck capacity: 1/2" (13 mm)
- Weight: 4.3 lb (1.95 kg)
- Length: 9.25" (235 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 1/2" - 20 Spindle thread

CE



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

INLINE AIR DRILLS
RIGHT ANGLE DRILLS
DRILL ACCESSORIES



3/8" (10 mm) Inline Air Drill

Model No. 5434

- Keyed Chuck
- Non-Reversible
- Aluminum housing
- Lockoff level throttle
- Rear exhaust
- Built-in speed regulator
- Free speed: 2500 rpm
- Chuck capacity: 3/8" (10 mm)
- Weight: 2.0 lb (0.9 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 3/8" - 24 Spindle thread



3/8" (10 mm) Inline Air Drill

Model No. 5434KL

- Keyless Chuck
- Non-Reversible
- Aluminum housing
- Lockoff level throttle
- Rear exhaust
- Built-in speed regulator
- Chuck capacity: 3/8" (10 mm)
- Free speed: 2500 rpm
- Weight: 2.0 lb (0.9 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 3/8" - 24 Spindle thread



3/8" (10 mm) Right Angle Drill

Model No. FDR5430

- Keyed chuck
- Reversible
- Aluminum housing
- Rear exhaust
- Built-in speed regulator
- Free speed: 1200 rpm
- Chuck capacity: 3/8" (10 mm)
- Weight: 2.5 lb (1.1 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 3/8" - 24 Spindle thread



3/8" (10 mm) Right Angle Drill

Model No. 5430KL

- Keyless chuck
- Reversible
- Aluminum housing
- Rear exhaust
- Built-in speed regulator
- Free speed: 1200 rpm
- Chuck capacity: 3/8" (10 mm)
- Weight: 2.5 lb (1.1 kg)
- Length: 8.0" (200 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 3/8" - 24 Spindle thread



Quick Change Chuck: Part No. 2352

Adapts 3/8"-24 threaded spindles to 1/4" hex quick change



Drill Chucks & Keys

Adapts arbor with 1/2"-20 thread to hole saw with 5/8"-18 thread

| Chuck Capacity | Thread Size | Chuck Part No. | Key Part No. | Key Holder No. |
|---------------------------|-------------|----------------|--------------|----------------|
| 0 - 1/4" | 3/8" - 24 | 21077 | 30000 | |
| 0 - 1/4" | 3/8" - 24 | 21019A | 30202 | |
| 0 - 3/8" | 1/2" - 20 | 21002 | 30011 | 14273 |
| 0 - 3/8" | 3/8" - 24 | 21085 | 30231 | 14273 |
| 1/16" - 3/8" | 1/2" - 20 | 21131 | 30002 | |
| 1/16" - 3/8" | 3/8" - 24 | 21133 | 30002 | 14273 |
| 1/16" - 3/8" ¹ | 3/8" - 24 | 65562 | | |
| 5/64" - 1/2" | 3/8" - 24 | 21132 | 30429 | |
| 5/64" - 1/2" | 1/2" - 20 | 21137 | 30011 | 14273 |
| 5/64" - 1/2" ¹ | 1/2" - 20 | 506209 | | |

¹Keyless Chuck
 Keyed chucks include key



Side Handle

506156 / 506155

| Part Number | Description | Used On |
|-------------|-------------|---------|
| 506155 | Clamp Ring | 5450R |
| 506156 | Handle | 5450R |



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



ASSEMBLY

| | |
|--|---------|
| Ratchet Wrenches | 13 |
| 3/8" (10 mm) Impact Wrenches | 14 - 15 |
| 1/2" (13 mm) Impact Wrenches | 15 - 16 |
| 3/4" (19 mm) Impact Wrenches | 16 - 17 |
| 1" (25 mm) Impact Wrenches | 17 - 18 |
| Assembly Accessories | 18 |



We're Making A Big Impact

Impact wrenches are the true workhorses of industrial power tools. These incredibly powerful tools make easy work of any job in a variety of applications. Before the creation of impact tools, workers had to manually strike a hammer against a hand wrench in order to loosen or tighten nuts or bolts. They could only manage a few blows per minute. But today's impact wrenches can exert more powerful blows, and some can produce up to 1,200 blows per minute. This is accomplished by using the energy of compressed air and converting the motor's torque into a rapid series of powerful rotary impacts.

Choice of Configuration

Sioux Tools offers Force Impact Wrenches and Impact Drivers in a wide variety of configurations to meet your specific needs. Choosing the right mix of features such as handle configuration, type of retainer, torque output, anvil length, and drive size will make operators more

productive, with less risk of discomfort and/or injury.

Built Tough

Built to a higher level of quality, Force Impact Wrenches and Impact Drivers are built a step above the standard. Manufactured from high quality materials, and utilizing the most advanced motor and clutch designs, these tools are constructed to hold in the toughest working environments.

High Quality

Force Impact Wrenches and Impact Drivers provide a high quality, cost-effective choice for your impact requirements. Featuring one of the widest selections of impact tools for general industry, Sioux Force impacts reach all aspects of the maintenance and repair market and beyond to manufacturing applications. With drive sizes ranging from, 1/4" (6 mm) to 1" (25 mm), including hex quick change drives, and torque outputs up to 2700 ft lb (3661 Nm), finding the tool to meet your performance requirements will be simple.

Our extensive lineup of impact tools includes a wide selection of important features including:

- Twin Hammer, Pin or Roller Cam impact mechanisms
- Inline, pistol grip, or D handle configurations
- Pin, friction ring, quick change, or thru hole socket retainers
- Standard or extended anvils



RACHET WRENCHES



3/8" (10 mm) Ratchet Wrench



Model No. 5007

- Steel angle head
- Aluminum housing
- Ergonomic Composite Grip
- Grade 5 bolt capacity: 5/16" (8 mm)
- Drive size: 3/8" (10 mm)
- Maximum torque: 20 ft lb (27 Nm)
- Free speed: 265 rpm
- Weight: 1.3 lb (0.55 kg)
- Length: 6.6" (168 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 1.4 cfm (37 l/s) avg. – 5.2 cfm (147 l/s) max.



1/4" (6 mm) Ratchet Wrench



Model No. 5009

- Steel angle head
- Aluminum housing
- Ergonomic Composite Grip
- Grade 5 bolt capacity: 5/16" (8 mm)
- Drive size: 1/4" (6 mm)
- Maximum torque: 20 ft lb (27 Nm)
- Free speed: 265 rpm
- Weight: 1.5 lb (0.5 kg)
- Length: 6.6" (168 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 1.2 cfm (37 l/s) avg. – 5.2 cfm (147 l/s) max.



3/8" (10 mm) Ratchet Wrench



Model No. 5011

- Steel angle head
- Aluminum housing
- Ergonomic Composite Grip
- Grade 5 bolt capacity: 7/16" (11 mm)
- Drive size: 3/8" (10 mm)
- Maximum torque: 50 ft lb (68 Nm)
- Free speed: 185 rpm
- Weight: 2.6 lb (1.2 kg)
- Length: 10.8" (274 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.0 cfm (85 l/s) avg. – 12.0 cfm (340 l/s) max.



1/2" (13 mm) Ratchet Wrench



Model No. 5013

- Steel angle head
- Aluminum housing
- Ergonomic Composite Grip
- Grade 5 bolt capacity: 7/16" (11 mm)
- Drive size: 1/2" (13 mm)
- Maximum torque: 50 ft lb (68 Nm)
- Free speed: 185 rpm
- Weight: 2.6 lb (1.2 kg)
- Length: 10.8" (274 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.0 cfm (85 l/s) avg. – 12.0 cfm (340 l/s) max.



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

IMPACT WRENCHES

3/8" (10mm)



3/8" (10 mm) Inline Impact Wrench

Model No. 5035

- Lever start
- Suspension Bail
- Steel anvil housing
- Twin Hammer Impact mechanism
- Built-in power regulator
- Friction Ring Socket Retainer
- Grade 5 bolt capacity: 3/8" (10 mm)
- Drive size: 3/8" (10 mm)
- Working torque range: 5-60 ft lb (7-81 Nm)
- Max. torque: 80 ft lb (108 Nm)
- Free speed: 7000 rpm
- Blows per minute: 1200
- Weight: 2.7 lb (1.2 kg)
- Length: 8.6" (218 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.6 cfm (102 l/s) avg. – 14.5 cfm (410 l/s) max.



3/8" (10 mm) Inline Impact Wrench

Model No. 5035P

- Lever start
- Suspension Bail
- Steel anvil housing
- Twin Hammer Impact mechanism
- Built-in power regulator
- Pin Socket Retainer
- Grade 5 bolt capacity: 3/8" (10 mm)
- Drive size: 3/8" (10 mm)
- Working torque range: 5-60 ft lb (7-81 Nm)
- Max. torque: 80 ft lb (108 Nm)
- Free speed: 7000 rpm
- Blows per minute: 1200
- Weight: 2.7 lb (1.2 kg)
- Length: 8.6" (218 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.6 cfm (102 l/s) avg. – 14.5 cfm (410 l/s) max.



3/8" (10 mm) Butterfly Impact Wrench

Model No. 5045

- Built-in power regulator
- Swivel air inlet bushing
- Friction ring socket retainer
- Grade 5 bolt capacity: 3/8" (10 mm)
- Drive size: 3/8" (10 mm)
- Working torque range: 15-160 ft lb (20-217 Nm)
- Max. torque: 175 ft lb (237 Nm)
- Free speed: 9500 rpm
- Blows per minute: 1850
- Weight: 2.5 lb (1.1 kg)
- Length: 7.6" (193 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 2.5 cfm (1.2 l/s) avg.
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 2.5 cfm (1.2 l/s) avg.



3/8" (10 mm) Butterfly Impact Wrench

Model No. 5045P

- Built-in power regulator
- Swivel air inlet bushing
- Pin socket retainer
- Grade 5 bolt capacity: 3/8" (10 mm)
- Drive size: 3/8" (10 mm)
- Working torque range: 15-160 ft lb (20-217 Nm)
- Max. torque: 175 ft lb (237 Nm)
- Free speed: 9500 rpm
- Blows per minute: 1850
- Weight: 2.5 lb (1.1 kg)
- Length: 7.6" (193 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 2.5 cfm (1.2 l/s) avg.



3/8" (10 mm) Impact Wrench

Model No. 5038B

- Reverse bias power
- Pin style impact mechanism
- Oil bath lubrication
- Built-in power regulator
- Molded comfort grip
- Friction ring socket retainer
- Grade 5 bolt capacity: 3/8" (10 mm)
- Drive size: 3/8" (10 mm)
- Working torque range: 50-160 ft lb (68-217 Nm)
- Max. torque: 185 ft lb (251 Nm)
- Free speed: 8500 rpm
- Blows per minute: 1160
- Weight: 3.7 lb (1.7 kg)
- Length: 6.3" (160 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.5 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max.



3/8" (10 mm) Impact Wrench

Model No. 5039B

- Reverse bias power
- Pin style impact mechanism
- Oil bath lubrication
- Molded comfort grip
- Built-in power regulator
- Pin socket retainer
- Grade 5 bolt capacity: 3/8" (10 mm)
- Drive size: 3/8" (10 mm)
- Working torque: 50-160 ft lb (68-217 Nm)
- Max. torque: 185 ft lb (251 Nm)
- Free speed: 8500 rpm
- Blows per minute: 1,160
- Weight: 3.7 lb (1.7 kg)
- Length: 6.3" (160 mm)
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.4 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max.



IMPACT WRENCHES
3/8" (10mm) & 1/2" (13mm)

3/8" (10 mm) Quiet Composite Impact



CE

Model No. 5338A

- Friction Ring Socket Retainer
- Reverse bias motor
- Twin hammer impact mechanism
- Three Level power control
- Lightweight composite housing
- Contoured trigger for comfort and control
- Grade 5 bolt capacity: 3/8" (10 mm)
- Drive Size: 3/8"
- Working torque: 100 - 180 ft/lbs (135 - 245 Nm)
- Max. torque: 250 ft/lbs (339 Nm)
- Free speed: 9000 RPM
- Blows per minute: 900
- Weight: 2.7 lbs (1.21 kg)
- Length: 6.5" (165 mm)
- Air inlet size: 1/4" NPT
- Low sound level 85 dB (A)
- Recommended hose size: 3/8" (10 mm)
- Average Air consumption: 2.8 cfm (1.3 l/s)

3/8" (10 mm) Quiet Composite Impact



CE

Model No. 5338AP

- Pin Socket Retainer
- Reverse bias motor
- Twin hammer impact mechanism
- Three Level power control
- Lightweight composite housing
- Contoured trigger for comfort and control
- Grade 5 bolt capacity : 3/8" (10 mm)
- Drive Size : 3/8"
- Working torque : 100 - 180 ft/lbs (135 - 245 Nm)
- Max. torque : 250 ft/lbs (339 Nm)
- Free speed : 9000 RPM
- Blows per minute : 900
- Weight : 2.7 lbs (1.21 kg)
- Length : 6.5" (165 mm)
- Air inlet size : 1/4" NPT
- Low sound level 85 dB (A)
- Recommended hose size : 3/8" (10 mm)
- Average Air consumption : 2.8 cfm (1.3 l/s)

1/2" (13 mm) Impact Wrench



CE

Model No. 5000A

- Twin hammer impact mechanism
- Front exhaust
- Built-in power regulator
- Friction ring socket retainer
- Grade 5 bolt capacity: 5/8" (16 mm)
- Drive size: 1/2" (13 mm)
- Working torque: 25-300 ft lb (34-407 Nm)
- Max. torque: 425 ft lb (576 Nm)
- Free speed: 8000 rpm
- Blows per minute: 1,200
- Weight: 5.6 lb (2.5 kg)
- Length: 7.4" (188 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 4.2 cfm (120 l/s) avg. - 16.8 cfm (475 l/s) max.

1/2" (13 mm) Impact Wrench



CE

Model No. 5000AP

- Twin hammer impact mechanism
- Front exhaust
- Built-in power regulator
- Pin socket retainer
- Grade 5 bolt capacity: 5/8" (16 mm)
- Drive size: 1/2" (13 mm)
- Working torque: 25-300 ft lb (34-407 Nm)
- Max. torque: 425 ft lb (576 Nm)
- Free speed: 8000 rpm
- Blows per minute: 1,200
- Weight: 5.6 lb (2.5 kg)
- Length: 7.4" (188 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 4.2 cfm (120 l/s) avg. - 16.8 cfm (475 l/s) max.

1/2" (13 mm) Impact Wrench




CE

Model No. 5250A

- Reverse bias power
- Pin style impact mechanism
- Oil bath lubrication
- Built-in power regulator
- Molded comfort grip
- Friction ring socket retainer
- Grade 5 bolt capacity: 5/8" (16 mm)
- Drive size: 1/2" (13 mm)
- Working torque: 50-375 ft lb (68-508 Nm)
- Max. torque: 525 ft lb (712 Nm)
- Free speed: 7000 rpm
- Blows per minute: 985
- Weight: 6.0 lb (2.7 kg)
- Length: 7.7" (196 mm)
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.5 cfm (100 l/s) avg. - 14.0 cfm (395 l/s) max.

1/2" (13 mm) Impact Wrench

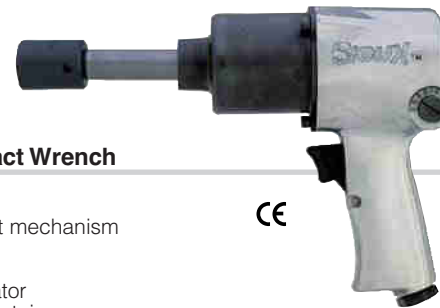

CE

Model No. 5000AL

- Twin hammer impact mechanism
- 2" Extended Anvil
- Front exhaust
- Built-in power regulator
- Friction ring socket retainer
- Grade 5 bolt capacity: 5/8" (16 mm)
- Drive size: 1/2" (13 mm)
- Working torque: 25-300 ft lb (34-407 Nm)
- Max. torque: 425 ft lb (576 Nm)
- Free speed: 8000 rpm
- Blows per minute: 1,200
- Weight: 5.6 lb (2.5 kg)
- Length: 9.4" (240 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 4.2 cfm (120 l/s) avg. - 16.8 cfm (475 l/s) max.



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

IMPACT WRENCHES

1/2" (13mm) & 3/4" (19mm)



1/2" (13 mm) Quiet Composite Impact

Model No. 5350A

- Friction Ring Socket Retainer
- Reverse bias motor
- Twin hammer impact mechanism
- Three Level power control
- Lightweight composite housing
- Contoured trigger for comfort and control
- Grade 5 bolt capacity : 5/8" (16 mm)
- Drive Size : 1/2"
- Working torque : 100 - 450 ft/lbs. (135 - 610 Nm)
- Max. torque : 520 ft.lbs. (705 Nm)
- Free speed : 6300 RPM
- Blows per minute : 1200
- Weight : 4.6 lbs. (2.07 kg)
- Length : 6.7" (170 mm)
- Air inlet size : 1/4" NPT
- Low sound level 82 dB (A)
- Recommended hose size : 3/8" (10 mm)
- Average Air consumption : 3.9 cfm (1.8 l/s)



1/2" (13 mm) Quiet Composite Impact

Model No. 5350AP

- Pin Socket Retainer
- Reverse bias motor
- Twin hammer impact mechanism
- Three Level power control
- Lightweight composite housing
- Contoured trigger for comfort and control
- Grade 5 bolt capacity : 5/8" (16 mm)
- Drive Size : 1/2"
- Working torque : 100 - 450 ft/lbs. (135 - 610 Nm)
- Max. torque : 520 ft.lbs. (705 Nm)
- Free speed : 6300 RPM
- Blows per minute : 1200
- Weight : 4.6 lbs. (2.07 kg)
- Length : 6.7" (170 mm)
- Air inlet size : 1/4" NPT
- Low sound level 82 dB (A)
- Recommended hose size : 3/8" (10 mm)
- Average Air consumption : 3.9 cfm (1.8 l/s)



1/2" (13 mm) Impact Wrench

Model No. 5050A

- Reverse bias power
- Twin hammer impact mechanism
- Built-in power regulator
- Down handle exhaust
- Steel anvil housing
- Friction ring socket retainer
- Grade 5 bolt capacity: 5/8" (16 mm)
- Drive size: 1/2" (13 mm)
- Working torque: 50-350 ft lb (68-474 Nm)
- Max. torque: 475 ft lb (644 Nm)
- Free speed: 8,000 rpm
- Blows per minute: 1100
- Weight: 5.6 lb (2.5 kg)
- Length: 7.4" (188 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.6 cfm (102 l/s) avg. – 14.5 cfm (410 l/s) max.



1/2" (13 mm) Impact Wrench

Model No. 5051A

- Reverse bias power
- Twin hammer impact mechanism
- Built-in power regulator
- Down handle exhaust
- Steel anvil housing
- Pin socket retainer
- Grade 5 bolt capacity: 1/2" (13 mm)
- Drive size: 1/2" (13 mm)
- Working torque: 50-350 ft lb (68-474 Nm)
- Max. torque: 475 ft lb (644 Nm)
- Free speed: 8000 rpm
- Blows per minute: 1,100
- Weight: 5.6 lb (2.5 kg)
- Length: 7.4" (188 mm)
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.5 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max.



3/4" (19 mm) Impact Wrench

Model No. 5075A

- Aluminum housing
- Steel anvil housing
- Roller cam impact mechanism
- Built-in power regulator
- Friction ring and thru hole socket retainer
- Grade 5 bolt capacity: 3/4" (19 mm)
- Drive size: 3/4" (19 mm)
- Working torque: 300-800 ft lb (34-1084 Nm)
- Max. torque: 1200 ft lb (1627 Nm)
- Free speed: 4500 rpm
- Blows per minute: 870
- Weight: 12.6 lb (5.7 kg)
- Length: 10.2" (259 mm)
- Recommended hose size: 1/2" (13 mm)
- Air Consumption: 5.8 cfm (164 l/s) avg. – 23.2 cfm (655 l/s) max.



3/4" (19 mm) Impact Wrench

Model No. 5075AL

- Roller cam impact mechanism
- 6" (152 mm) extended anvil
- Oil bath lubrication
- Molded comfort grip
- Built-in power regulator
- Friction ring and thru hole socket retainer
- Grade 5 bolt capacity: 3/4" (19 mm)
- Drive size: 3/4" (19 mm)
- Working torque: 300-800 ft lb (34-1084 Nm)
- Max. torque: 1200 ft lb (1627 Nm)
- Free speed: 4500 rpm
- Blows per minute: 870
- Weight: 15.7 lb (7.1 kg)
- Length: 16.2" (411 mm)
- Recommended hose size: 1/2" (13 mm)
- Air Consumption: 5.8 cfm (164 l/s) avg. – 23.2 cfm (655 l/s) max.



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

IMPACT WRENCHES
3/4" (19mm) & 1" (25mm)



3/4" (19 mm) Quiet Composite Impact

Model No. 5375A

- Friction Ring Socket Retainer
- Reverse bias motor
- Twin hammer impact mechanism
- Three Level power control
- Lightweight composite housing
- Contoured trigger for comfort and control
- Grade 5 bolt capacity: 3/4" (19 mm)
- Drive Size: 3/4"
- Working torque: 300 - 800 ft/lbs. (407 - 1085 Nm)
- Max. torque: 1000 ft/lbs. (1356 Nm)
- Free speed: 4000 RPM
- Blows per minute: 300
- Weight: 8.5 lbs. (3.8 kg)
- Length: 9.5" (240 mm)
- Air inlet size: 3/8" NPT
- Low sound level 82 dB (A)
- Recommended hose size: 1/2" (13 mm)
- Average Air consumption: 5.6 cfm (2.6 l/s)



3/4" (19 mm) Quiet Composite Impact

Model No. 5375AP


- Thru Hole Socket Retainer
- Reverse bias motor
- Twin hammer impact mechanism
- Three Level power control
- Lightweight composite housing
- Contoured trigger for comfort and control
- Grade 5 bolt capacity: 3/4" (19 mm)
- Drive Size: 3/4"
- Working torque: 300 - 800 ft/lbs. (407 - 1085 Nm)
- Max. torque: 1000 ft/lbs. (1356 Nm)
- Free speed: 4000 RPM
- Blows per minute: 300
- Weight: 8.5 lbs. (3.8 kg)
- Length: 9.5" (240 mm)
- Air inlet size: 3/8" NPT
- Low sound level 82 dB (A)
- Recommended hose size: 1/2" (13 mm)
- Average Air consumption: 5.6 cfm (2.6 l/s)



1" (25 mm) High Torque Impact Wrench

Catalog No. 5092

- Pin impact mechanism
- Oil bath lubrication
- Support handle
- Friction Ring and Thru hole socket retainer
- Grade 5 bolt capacity: 1-1/2" (38 mm)
- Drive size: 1" (25 mm)
- Working torque: 600-1400 ft lb (813-1898 Nm)
- Max. torque: 2800 ft lb (3797 Nm)
- Free speed: 4000 rpm
- Blows per minute: 500
- Weight: 24.9 lb (11.3 kg)
- Length: 11.9" (302 mm)
- Recommended hose size: 1/2" (13 mm)
- Air Consumption: 8.3 cfm (235 l/s) avg. – 33.2 cfm (938 l/s) max.

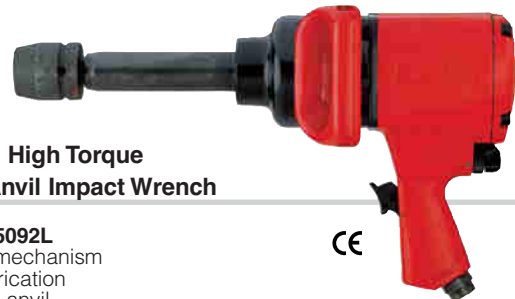

1" (25 mm) High Torque Extended Anvil Impact Wrench

Catalog No. 5092L

- Pin impact mechanism
- Oil bath lubrication
- 6" extended anvil
- Support handle
- Friction Ring and Thru hole socket retainer
- Grade 5 bolt capacity: 1-1/2" (38 mm)
- Drive size: 1" (25 mm)
- Working torque: 500-1300 ft lb (675-1762 Nm)
- Max. torque: 2500 ft lb (3390 Nm)
- Free speed: 4000 rpm
- Blows per minute: 500
- Weight: 27.3 lb (12.4 kg)
- Length: 16.9" (429 mm)
- Recommended hose size: 1/2" (13 mm)
- Air Consumption: 8.3 cfm (235 l/s) avg. – 33.2 cfm (938 l/s) max.



1" (25 mm) High Torque Impact Wrench

Catalog No. 5093

- Pin impact mechanism
- Oil bath lubrication
- Support handle
- Friction Ring and Thru hole socket retainer
- Grade 5 bolt capacity: 1-1/2" (38 mm)
- Drive size: 1" (25 mm)
- Working torque: 600-1400 ft lb (813-1898 Nm)
- Max. torque: 3000 ft lb (4068 Nm)
- Free speed: 4000 rpm
- Blows per minute: 500
- Weight: 25.6 lb (11.6 kg)
- Length: 15.1" (384 mm)
- Recommended hose size: 1/2" (13 mm)
- Air Consumption: 8.3 cfm (235 l/s) avg. – 33.2 cfm (938 l/s) max.



1" (25 mm) High Torque Impact Wrench

Catalog No. 5093L

- Pin impact mechanism
- 6" extended anvil
- Oil bath lubrication
- Support handle
- Friction Ring and Thru hole socket retainer
- Grade 5 bolt capacity: 1-1/2" (38 mm)
- Drive size: 1" (25 mm)
- Working torque: 500-1300 ft lb (675-1762 Nm)
- Max. torque: 2700 ft lb (3661 Nm)
- Free speed: 4000 rpm
- Blows per minute: 500
- Weight: 28.0 lb (12.7 kg)
- Length: 21.1" (536 mm)
- Recommended hose size: 1/2" (13 mm)
- Air Consumption: 8.3 cfm (235 l/s) avg. – 33.2 cfm (938 l/s) max.



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

IMPACT WRENCHES

1" (25mm)


ASSEMBLY ACCESSORIES



1" (25 mm) Impact Wrench

Model No. 5095

- Friction ring and thru hole socket retainer
- Reverse bias motor
- Twin hammer impact mechanism
- Steel hammer case
- Three piece housing
- Support handle included
- Grade 5 bolt capacity: 1 1/4" (32 mm)
- Drive Size: 1"
- Working torque: 500 - 1200 ft/lbs. (675 - 1625 Nm)
- Max. torque: 1400 ft/lbs. (1900 Nm)
- Free speed: 5000 RPM
- Blows per minute: 900
- Weight: 16.8 lbs. (7.6 kg)
- Length: 14.5" (370 mm)
- Air inlet size: 1/2" NPT
- Recommended hose size: 1/2" (13 mm)
- Average Air consumption: 15 cfm (7 l/s)

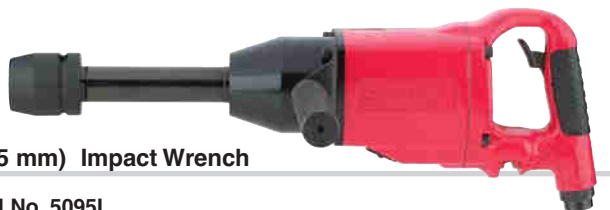

1" (25 mm) Impact Wrench

Model No. 5095L

- Friction ring and thru hole socket retainer
- Reverse bias motor
- Twin hammer impact mechanism
- Steel hammer case
- Three piece housing
- Support handle included
- Grade 5 bolt capacity: 1 1/4" (32 mm)
- Drive Size: 1"
- Working torque: 500 - 1200 ft/lbs. (675 - 1625 Nm)
- Max. torque: 1400 ft/lbs. (1900 Nm)
- Free speed: 5000 RPM
- Blows per minute: 900
- Weight: 18.2 lbs. (8.2 kg)
- Length: 18.25" (465 mm)
- Air inlet size: 1/2" NPT
- Recommended hose size: 1/2" (13 mm)
- Average Air consumption: 15 cfm (7 l/s)



Socket Retaining Pins with "O" Rings

| Retaining Pin | "O" Ring | For Use On |
|---------------|----------|----------------------------------|
| 34911 | 14318 | 3/4" Dr. Sockets 6620-6638 |
| 34664 | 14317 | 3/4" Dr. Sockets 6640-6654 |
| 34665 | 14319 | Adaptor 2568, All 1" Dr. Sockets |



Quick Change Chuck

Adapts male square drive to female hex quick change

| Part Number | Drive Size | | Length |
|-------------|----------------------|--------------|----------|
| | Input (Square Drive) | Output (Hex) | |
| 2530 | 3/8" | 1/4" | 1-13/16" |
| 2520 | 1/2" | 7/16" | |



Ergonomic Handle Grip

Part No. 5002

Fits most Sioux Pistol Grip. Air Tools and Impacts, etc.



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



Abrasive Index

| | |
|--------------------------------|----|
| Straight Die Grinders | 21 |
| Right Angle Die Grinders | 22 |



Make Easy Work Out Of A Daily Grind

Force grinders are ready to take on any application with the power to make the job fast and easy. This means new speeds and attachments to handle increased precision with ergonomic comfort.

Force Grinders

Our line-up of Force Grinders continues to be among the most popular in the industry. The choice of light, medium and heavy-duty performance allow you to own the right tool for the right job that remains cost-effective. We have both straight and right angle models to fit any application

Our Pencil Die Grinders are lightweight powerhouses with a choice of either 50,000 rpm or an incredible 70,000 rpm for exceptional performance.

Safety

When operating any grinding tool be sure to follow all safety requirements and always wear eye and face protection. Doing so will protect both the operator and the tool.



STRAIGHT DIE GRINDERS



Pencil Die Grinder

Model No. 5978A

- Twist throttle
- Remote exhaust
- Built-in speed regulator
- Power: 0.1 hp (0.07 kw)
- Free speed: 54,000 rpm
- Collet size: 1/8"
- Weight: 0.25 lb (0.11 kg)
- Length: 5.3" (135 mm)
- 60" (1,524 mm) hose with hose protector included
- Air Consumption: 4.2 cfm (118 l/s) avg. – 16.8 cfm (474 l/s) max.



Pencil Die Grinder

Model No. 5979A

- Twist throttle
- Remote exhaust
- Built-in speed regulator
- Power: 0.1 hp (0.07 kw)
- Free speed: 70,000 rpm
- Collet size: 1/8"
- Weight: 0.25 lb (0.11 kg)
- Length: 5.3" (135 mm)
- 60" (1,524 mm) hose with hose protector included
- Air Consumption: 5.3 cfm (150 l/s) avg. – 21.2 cfm (598 l/s) max.



Pencil Die Grinder

Model No. 5977

- Twist throttle
- Remote exhaust
- Built in speed control
- Textured grip
- Free speed: 70,000 RPM
- Collet size: 1/8"
- Weight: .45 lb (.20 kg)
- Length: 6" (152 mm)
- 60" (1,524 mm) leader hose with protector included
- Air Consumption: .42 cfm (.20 l/s)



Light Duty Die Grinder

Model No. 5053A

- Lockoff lever throttle
- Comfort Grip
- Front exhaust
- Built-in speed regulator
- Aluminum housing
- Power: 0.3 hp (0.2 kw)
- Free speed: 26,000 rpm
- Collet size: 1/4"
- Weight: 0.8 lb (0.4 kg)
- Length: 5.3" (135 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 4.0 cfm (113 l/s) avg. – 16.0 cfm (452 l/s) max.



Medium Duty Die Grinder

Model No. 5054A

- Lockoff lever throttle
- Comfort Grip
- Rear exhaust
- Built-in speed regulator
- Aluminum housing
- Power: 0.5 hp (0.4 kw)
- Free speed: 22,000 rpm
- Collet size: 1/4"
- Weight: 1.3 lb (0.6 kg)
- Length: 6.5" (165 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 4.0 cfm (113 l/s) avg. – 16.0 cfm (452 l/s) max.



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

RIGHT ANGLE DIE GRINDERS



Heavy Duty Right Angle Die Grinder

Model No. 5055A

- Lockoff lever throttle
- Comfort Grip
- Aluminum housing
- Built-in speed regulator
- Power: 0.3 hp (0.2 kw)
- Free speed: 20,000 rpm
- Collet size: 1/4"
- Weight: 1.1 lb (0.5 kg)
- Length: 5.5" (140 mm)
- Head Height: 2.9" (74 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 4.0 cfm (113 l/s) avg. – 16.0 cfm (452 l/s) max.



Right Angle Light Duty Die Grinder

Model No. 5056

- Lockoff lever throttle
- Comfort Grip
- Rear Exhaust
- Built-in speed regulator
- Power: 0.5 hp (0.4 kw)
- Free speed: 16,000 rpm
- Collet size: 1/4"
- Weight: 2.0 lb (0.9 kg)
- Length: 7.5" (190 mm)
- Head Height: 3.0" (76 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 4.5 cfm (127 l/s) avg. – 18.0 cfm (508 l/s) max.



4 1/2" (115 mm) Right Angle Heavy Duty Grinder

Model No. 5268

- Aluminum housing
- Lockoff lever throttle
- Built-in speed regulator
- Free speed: 12,000 rpm
- Spindle size: 5/8" - 11
- Weight: 3.9 lb (1.7 kg)
- Length: 10.0" (254 mm)
- Head Height: 3.5" (90 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.3cfm (94 l/s) avg. – 13.2 cfm (373 l/s) max.



5" (127 mm) Right Angle Heavy Duty Grinder

Model No. 5285

- Aluminum housing
- Lockoff lever throttle
- Built-in speed regulator
- Free speed: 12,000 rpm
- Spindle size: 5/8" - 11
- Weight: 3.9 lb (1.7 kg)
- Length: 10.0" (254 mm)
- Head Height: 3.5" (90 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.3cfm (94 l/s) avg. – 13.2 cfm (373 l/s) max.



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



Finishing Index

| | |
|-----------------------------|---------|
| Sanders | 25 |
| Polishers | 25 |
| Finishing Accessories | 26 - 27 |

The Best Way To A Great Finish

If you're in the market for tough tools that will deliver the performance you demand, then you've found what you need with Force sanders, polishers and buffers. These exceptional tools take on any application from repair and maintenance to manufacturing. With state-of-the-art orbital sanders, polishers and buffers you will get your work done faster and more efficiently than ever.

Sioux sanders are engineered to cover the full range of applications in metal, composite, and wood finishing. Our innovative, lightweight designs ensure they perform to the highest standards while still being comfortable to operate. Each delivers unsurpassed power and performance, resulting in the perfect finish.

Fit to your application

Different applications require different finishing tools. That's why Sioux Tools offers a variety of sanders and polishers with a wide range of configurations.

Variety to choose from

We also offer pistol grip, right angle, vertical, and inline sanders and polishers. Many of these come with your choice of throttle controls that allow the operator to work the way that's most comfortable.



SANDERS & POLISHERS

Pistol Grip Sander

Model No. 5540

- Aluminum housing
- Built-in speed regulator
- Free Speed: 14,000 rpm
- Weight: 2.2 lb. (1.0 kg)
- Length: 4.3" (109 mm)
- Air inlet size: 1/4" NPT
- Spindle thread: 7/16"-20
- Recommended hose size: 3/8" (10 mm)
- 3" (75 mm) and 4-1/2" (115 mm) backing pads included
- Air Consumption: 12.0 cfm (340 l/s) avg. – 30.0 cfm (847 l/s) max.



Dual Action Sander

Model No. 5558A

- Built-in speed regulator
- Dual action sanding
- Vinyl grip and head cover
- Free speed: 10,000 rpm
- Pad diameter: 6" (150 mm)
- Weight: 4.3 lb. (2.0 kg)
- Height: 5.4" (137 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Sound level: 79 dB(A)
- 6" (150 mm) backing pad included
- Air Consumption: 5.0 cfm (142 l/s) avg. – 10.0 cfm (282 l/s) max.
- 3/8" (10 mm) Orbit Diameter



5" (125 mm) Right Angle Air Sander

Model No. 5265

- Lockoff lever throttle
- Safety lever throttle
- Removable auxiliary handle and wrenches
- Built-in speed regulator
- Rear exhaust
- Backing pad for 5" (125 mm) abrasives included
- Free Speed: 7000 rpm
- Weight: 2.9 lb. (1.32 kg)
- Length: 9.4" (240 mm)
- Spindle thread: 5/8" - 11
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 4.5 cfm (127 l/s) avg. – 18.0 cfm (508 l/s) max.



Dual Piston Inline Sander

Model No. 5560

- Dual handles
- Positive lock paper clamps
- 2500 spm (strokes per minute)
- Paper size: 2-3/4" x 17-1/2" (70 x 445 mm)
- Weight: 6.8 lb. (3.1 kg)
- Height: 16" (406 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Air Consumption: 3.0 cfm (85 l/s) avg. – 12.0 cfm (340 l/s) max.



Right Angle Sander

Model No. 5287A

- Lockoff lever throttle
- Support handle can be mounted on either side
- Rear exhaust
- Backing pad for 7" (180 mm) abrasives included
- Free Speed: 6000 rpm
- Pad diameter: 7" (180 mm)
- Weight: 4.4 lb. (2.0 kg)
- Length: 12.6" (320 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- Spindle thread: 5/8"-11
- Air Consumption: 4.8 cfm (135 l/s) avg. – 19.2 cfm (542 l/s) max.



Right Angle Polisher


Model No. 5238A

- Lock off lever throttle
- Support handle can be mounted on either side
- Built-in speed regulator
- Rear exhaust
- Free speed: 3000 rpm
- Pad diameter: 7" (175 mm)
- Weight: 4.4 lb (2.0 kg)
- Length: 12.6" (320 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 7" (175 mm) backing pad included.
- Air Consumption: 4.8 cfm (135 l/s) avg. – 19.2 cfm (542 l/s) max.



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

FINISHING ACCESSORIES

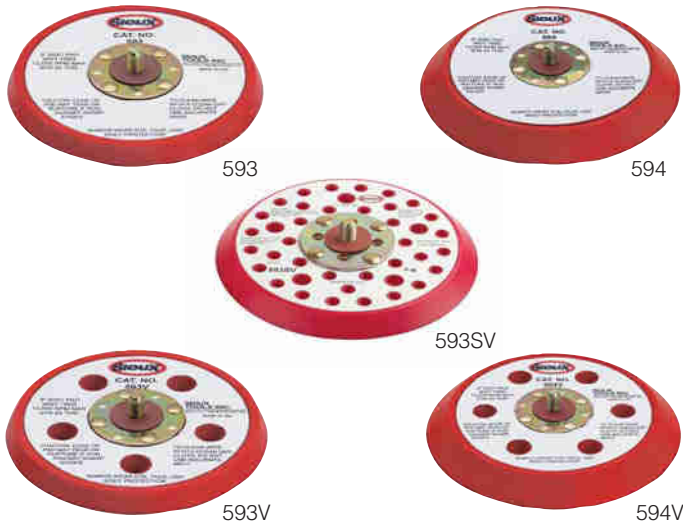

Speed-Lok Abrasive Discs

For use on Speed-Lok Backing Pads (Above)

| Part Number | Diameter | | Grit |
|-------------|----------|----|------|
| | In. | mm | |
| 587-60 | 2 | 50 | 60 |
| 587-120 | 2 | 50 | 120 |
| 587-240 | 2 | 50 | 240 |
| 588-60 | 3 | 75 | 60 |
| 588-120 | 3 | 75 | 120 |
| 588-240 | 3 | 75 | 240 |

Orbital Sander Backing Pads

Sioux random orbital backing pads are medium density, urethane pads rated for speeds up to 13,000 rpm. The 5" pads are a 3/8" thick with low profile design, while the 6" pads are 5/8" thick with tapered profile for fine feathering in corners or around edges.

| Part Number | Diameter | | Backing | Profile | Style |
|-------------|----------|-----|------------------|---------|------------|
| | In. | mm | | | |
| 593 | 5 | 125 | PSA ¹ | Low | Non-Vac |
| 593V | 5 | 125 | PSA ¹ | Low | Vacuum |
| 593J | 5 | 125 | H&L ² | Low | Non-Vac |
| 593JV | 5 | 125 | H&L ² | Low | Vacuum |
| 593SV | 5 | 125 | PSA ¹ | Low | Screen Vac |
| 594 | 6 | 150 | PSA ¹ | Tapered | Non-Vac |
| 594V | 6 | 150 | PSA ¹ | Tapered | Vacuum |
| 594J | 6 | 150 | H&L ² | Tapered | Non-Vac |
| 594JV | 6 | 150 | H&L ² | Tapered | Vacuum |
| 594SV | 5 | 125 | PSA ¹ | Low | Screen Vac |

¹PSA - Vinyl face for pressure sensitive adhesive sanding discs

²H&L - Hook and loop face



Speed-Lok Backing Pads

For use on tools with 1/4" collets

| Part Number | Diameter | | Shank Size |
|-------------|----------|----|------------|
| | In. | mm | |
| 587M | 2 | 50 | 1/4" |
| 588M | 3 | 75 | 1/4" |



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

FINISHING ACCESSORIES



581, 2344, 2364

Backing Pads

For use on tools with 1/4" collets

| Part Number | Diameter | | For Use On |
|-------------|----------|-----|-------------------------|
| | In. | mm | |
| 581* | 5 | 125 | 7/16"-20 spindle thread |
| 2344* | 5 | 125 | 3/8"-24 spindle thread |
| 2364* | 5 | 125 | 5/8"-11 spindle thread |

*includes disc nut 563



846 C



1211



524



847



1220



1214

Polishing Accessories

| Part Number | Description | For Use On |
|-------------|-----------------------------|---------------|
| 846C | Backing pad (includes 524) | All Polishers |
| 1211 | Wool polishing pad | All Polishers |
| 524 | Retaining nut | 846C |
| 847 | Hook & loop backing pad | 5238A |
| 1220 | Hook & loop polishing pad | 5238A |
| 1214 | Polishing pad cleaning tool | |



5205



5207

| Part Number | Diameter | | For Use On |
|-------------|----------|-----|---------------|
| | In. | mm | |
| 5205+ | 5 | 125 | 5265 |
| 5207* | 7 | 180 | 5287A & 5238A |

*includes disc nut No. 67630

+does not include disc nut No. 67630 (order separately)



505079

| Part Number | Diameter | | For Use On |
|-------------|-------------|----------|------------|
| | In. | mm | |
| 505079 | 2.75 X 17.5 | 70 X 445 | 5560 |



Fibre Backing Discs

Part No. 586

For use on 5540 series sander

Packaged in cartons of 6

Qty 3 - 3" (75 mm)

Qty 3 - 4-1/2" (110 mm)

Both have 7/8" (22 mm) arbor hole



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



Percussive Index

| | |
|------------------------------|----|
| Hammers | 31 |
| Scalers | 31 |
| Percussive Accessories | 32 |

Hammering Home A Point

Percussive tools, such as hammers, chippers and scalers, are commonly used in very abusive environments found in industries such as Foundry and Construction. Sioux Tools offers a variety of sizes, capacities and accessories built durable to ensure long life under tough operating conditions. We build them to work hard on the job, but not on you!

Force Tools

Our Force line-up of hammers deliver up to 4,800 blows per minute with stroke lengths from 1.8" (46 mm) to 3.8" (97 mm) and accept a .401 Parker Taper shank. Our lineup of Force scalers includes a weld flux scaler and mini-needle scaler that delivers 4,000 blows per minute with a 2" (50 mm) stroke.

We also feature a pistol grip needle scaler with a 3" (75 mm) stroke that delivers 3,000 blows per minute. You'll find a complete list of accessories for all Sioux percussive tools in the accessory section of this catalog.



**HAMMERS
SCALERS**

Hammer



Model No. 5272A

- Spring retainer
- Accepts .401 Parker Taper shanks
- Hardened steel barrel and piston
- Built-in Air Regulator
- Aluminum housing
- Stroke length: 1.6" (41 mm)
- Bore diameter: 0.8" (20 mm)
- Blows per minute: 4800
- Weight 3.0 lb (1.4 kg)
- Length: 5.8" (147 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)

Hammer



Model No. 5273A

- Spring retainer
- Accepts .401 Parker Taper shanks
- Built-in Air Regulator
- Hardened steel barrel and piston
- Aluminum housing
- Stroke length: 2.6" (66 mm)
- Bore diameter: 0.8" (20 mm)
- Blows per minute: 3200
- Weight 3.8 lb (1.7 kg)
- Length: 7.1" (180 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)

Hammer



Model No. 5274A

- Spring retainer
- Accepts .401 Parker Taper shanks
- Built-in Air Regulator
- Hardened steel barrel and piston
- Aluminum pistol-grip housing
- Stroke length: 3.8" (97 mm)
- Bore diameter: 0.8" (20 mm)
- Blows per minute: 2200
- Weight 4.7 lb (2.1 kg)
- Length: 9.3" (236 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)

Pistol Grip Needle Scaler



Model No. 5262

- Comfort Grip
- Hardened steel barrel and piston
- Stroke length: 3.0" (75 mm)
- Bore diameter: 0.9" (23 mm)
- Blows per minute: 3000
- Weight 5.7 lb (2.6 kg)
- Length: 13.5" (340 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 19-0.12" (3 mm) Dia. x 7 (180 mm) long needles included

Mini Needle Scaler



Model No. 5263

- Steel housing
- Hardened steel barrel and piston
- Stroke length: 2.0" (51 mm)
- Bore diameter: .7" (18 mm)
- Blows per minute: 4000
- Weight 2.6 lb (1.2 kg)
- Length: 11.4" (290 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 19 - 0.12" (3 mm) Dia. x 5" (125 mm) long needles included

Needle Scaler



Model No. 5266

- Steel housing
- Hardened steel barrel and piston
- Stroke length: 2.0" (51 mm)
- Bore diameter: 1.0" (25 mm)
- Blows per minute: 4000
- Weight 5.7 lb (2.6 kg)
- Length: 16.1" (409 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)
- 19 - 0.12" (3 mm) Dia. x 7" (180 mm) long needles included



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

PERCUSSIVE ACCESSORIES



Beehive Spring Retainers

| | |
|------|--|
| 2207 | Chisel Retainer Spring |
| 2208 | Special Spring, use in place of 2207 with 2201, 2205, 2716 2217, 2219 and 2220 |



270 Rivet Sets

3-1/2" Overall Length

| Rivet Head Cupping | Rivet Diameter Size | | | | |
|--------------------|---------------------|---------------|----------------|----------------|---------------|
| | 3/32" Part No. | 1/8" Part No. | 5/32" Part No. | 3/16" Part No. | 1/4" Part No. |
| Button Head | 2228 | 2229 | 2230 | 2231 | 2244 |
| Round Head | 2232 | 2233 | 2234 | 2235 | 2245 |
| Brazier Head | 2236 | 2237 | 2238 | 2239 | 2246 |
| Universal Head | 2240 | 2241 | 2242 | 2243 | 2241 |



Hammer Chuck

| Part Number | Description | For Use On |
|-------------|-------------------------------|---------------------|
| 2270 | Quick change air hammer chuck | 5272A, 5273A, 5274A |



Scaling Needles

| Part Number | Diameter | Length | Quantity | Used On |
|-------------|----------|--------|----------|---------|
| 2260 | 0.12" | 5" | 19 | Scalers |
| 2262 | 0.12" | 7" | 19 | Scalers |


Hammer Accessories

.401 Parker Taper shank

| Part Number | Description | Width | | Length | |
|-------------|-------------------|-------|----|--------|-----|
| | | In. | mm | In. | mm |
| 2201 | Cutter | | | 6 | 150 |
| 2202 | Chisel | | | 6 | 150 |
| 2203 | Rivet Buster | 5/8 | 16 | 5 1/2 | 140 |
| 2204 | Expansion Chisel | 5/8 | 16 | 11 | 280 |
| 2205 | Scraper | 1 1/4 | 30 | 6 | 150 |
| 2206 | Punch | | | 7 | 175 |
| 2210 | Punch | | | 5 | 127 |
| 2217 | Rust Breaker | | | 5 1/4 | 135 |
| 2212 | Spot Weld Breaker | | | 6 | 150 |
| 2213 | Splitter | | | 8 | 200 |
| 2214 | Edging Chisel | | | 5 | 140 |
| 2215 | Blank Chisel | | | 6 | 150 |
| 2216 | Fork Chisel | | | 6 7/8 | 175 |
| 2218 | Bushing Cutter | | | 7 | 175 |
| 2220 | Bushing Chisel | 1 5/8 | 40 | 7 | 175 |
| 2219 | Bushing Driver | | | 4 1/2 | 115 |



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

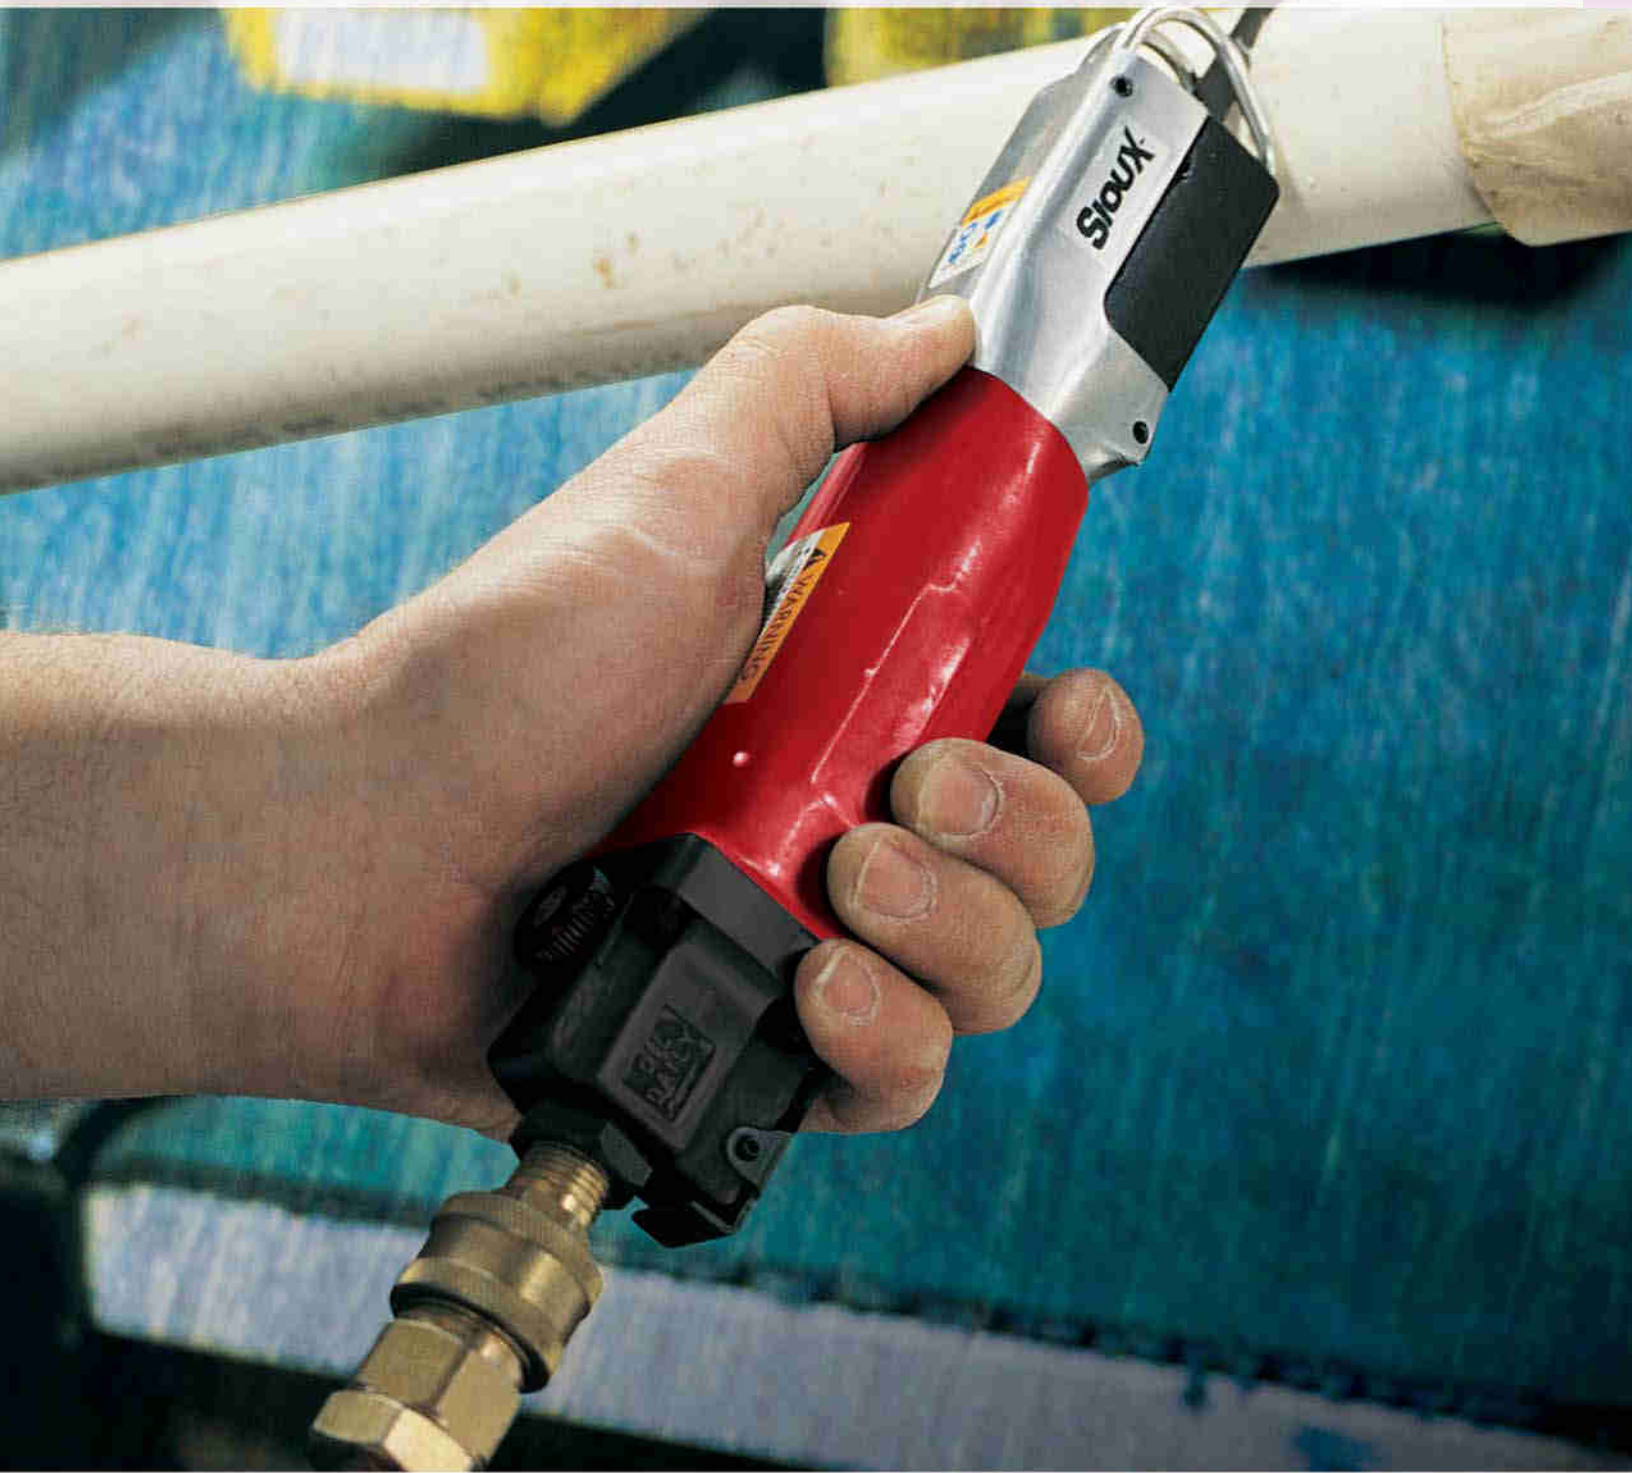

Specialty Index

| | |
|-----------------------------|----|
| Reciprocating Air Saw | 35 |
| Air Engraving Pen | 35 |
| Cut-off Tool | 35 |

Special Applications Require Special Tools

Sioux Tools has a history of designing specialty tools for very specific applications, and as always, we manufacture the finest tools in the industry. These tools will live up to your expectations in both power and ergonomics.

Reciprocating Saw

Operating at 10,000 strokes per minute, this powerful saw features an adjustable blade guard, lock-off lever throttle and a built-in speed regulator.

Cut-off Tool

We designed our cut-off tool to operate with a free speed of 21,000 and a lock-off lever throttle. The lightweight aluminum housing and rear exhaust make it very comfortable to operate.



Selection

If your application requires routers, tappers or metalworking tools like nibblers, check out the extensive line of Sioux Industrial Tools for a complete listing.

**RECIPROCATING AIR SAW
AIR ENGRAVING PEN
CUT-OFF TOOL**



Reciprocating Air Saw

Model No. 5300A

- Comfort Grip Handle
- 10,000 strokes per minute
- Adjustable Blade Guard
- Lockoff lever throttle
- Built-in speed regulator
- Weight: 1.8 lbs. (0.8 kg)
- Length: 9.2" (235 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 5/16" (8 mm)



Cut-off Tool

Model No. 5564A

- Rear exhaust
- Comfort Grip
- Lockoff lever throttle
- Aluminum housing
- Free speed: 21,000 rpm
- Wheel size: 3.0" (76 mm)
- Weight: 1.8 lb (0.8 kg)
- Length: 8.0" (203 mm)
- Air inlet size: 1/4" NPT
- Recommended hose size: 3/8" (10 mm)



1823



1824B



1825



Bi-Metal Saw Blade (5 Pack)

| Part Number | Description | Length |
|-------------|-------------------------|------------|
| 1823 | Bi-Metal Blade - 18 TPI | 4" (100mm) |
| 1824B | Bi-Metal Blade - 24 TPI | 4" (100mm) |
| 1825 | Bi-Metal Blade - 32 TPI | 4" (100mm) |



Air Engraving Pen

Model No. 5980

- 13,000 cycles per minute
- Replaceable carbide tipped points
- Twist throttle
- 59" (1500 mm) hose
- 1/4" NPT air fitting
- High quality stainless steel housing
- Replaceable engraving points
 - 506246 - 45° (STD)
 - 506245 - 30°
 - 506244 - 15°



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



Air Hoses

| Part Number | I.D. | | Length | | Fittings |
|-------------|------|----|--------|------|----------|
| | In. | mm | ft | m | |
| 1359B | 1/4 | 6 | 6 | 2.7 | 1/4" NPT |
| 1376 | 3/8 | 10 | 6 | 2.7 | 1/4" NPT |
| 1377 | 3/8 | 10 | 25 | 11.0 | 1/4" NPT |
| 1361 | 1 | 25 | 4 | 1.8 | None |



1338-25



1338FC-25

Sioux-Per Swivel

Allows the air hose to rotate 360° on 2 axes

Part No. 1338-25

1/4" non-regulated air swivel connector with safety pin design

Part No. 1338-38

3/8" non-regulated air swivel connector with safety pin design

Part No. 1338-50

1/2" non-regulated air swivel connector with safety pin design

Part No. 1338FC-25

1/4" regulated air swivel connector with safety pin design



1316



1391



1395

High-Capacity Quick Change Couplers

| Part Number | Description | Thread |
|-------------|-----------------------|----------|
| 1316 | Male Coupler Nipple | 1/4" NPT |
| 1317 | Male Coupler Nipple | 3/8" NPT |
| 1318 | Male Coupler Nipple | 1/4" NPT |
| 1391 | Quick Change Coupler | 1/4" NPT |
| 1392 | Quick Change Coupler | 3/8" NPT |
| 1393 | Quick Change Coupler | 1/2" NPT |
| 1395 | Female Coupler Nipple | 1/4" NPT |
| 1396 | Female Coupler Nipple | 3/8" NPT |
| 1397 | Female Coupler Nipple | 1/2" NPT |



Air Regulator

Part No. 1335B

1/4" NPT Male / Female



2300-4

Balancers

| Part Number | Capacity | | Cable Length | |
|-------------|----------|-----------|--------------|-----|
| | lb | mm | ft | m |
| 2300-4 | 2 - 4 | 0.9 - 1.8 | 5.2 | 1.6 |
| 2300-6 | 4 - 6 | 1.8 - 2.7 | 6.7 | 2.0 |
| 2300-8 | 6 - 8 | 2.7 - 3.6 | 6.7 | 2.0 |

Air Motor Oil For Air Tools

Part No. 288

1/2 Pint

Part No. 288-1

1 Quart

Part No. 288-2

2 Liter



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1



Filter, Regulator, Lubricator Assembly

Part No. 1660
1/2" NPT fittings
Air flow: 30 - 75 cfm

| Part Number | Description |
|-------------|------------------------------------|
| 1660 | Complete Air Control Unit, 1/2"PT |
| 1661 | Lubricator Only, 1/2"PT |
| 1662A | Regulator with Gauge, 1/2"PT |
| 1663 | Manual Flex Drain Filter, 1/2"PT |
| 1664 | Manifold Block |
| 1665 | Connecting End Blocks |
| 1666 | Modular Sleeve ("O" Ring included) |
| 1667 | Automatic Drain - Optional |
| 1668 | Sleeve Wall Mounting Bracket |



Filter, Regulator, Lubricator Assembly

Part No. 1651MA
3/4" NPT air fittings
Air flow: over 75 cfm

| Part Number | Description |
|-------------|---|
| 1651MA | Complete Automatic Air Control Unit, 3/4" PT, larger capacity and float type filter for automatic drain |
| 1652M | Lubricator only, 3/4" PT, 1 quart capacity |
| 1654B | Regulator with Gauge, 3/4" PT |
| 1653MA | Automatic Air Filter, 3/4" PT, automatic float drain empties when full |



Nylon Recoil Air Hose


| Part Number | I.D. | | Length | | Fittings |
|-------------|------|----|--------|----|----------|
| | in. | mm | ft | m | |
| 1326 | 1/4 | 6 | 25 | 11 | 1/4" NPT |
| 1327 | 3/8 | 10 | 25 | 11 | 1/4" NPT |

Grease

| Part Number | Size |
|-------------|--------------|
| 289A | 1 Quart |
| 289A-1 | 2 Pounds |
| 289A-2 | 6 Pounds |
| 1198 | 6 Ounces |
| 1198-1 | 2 Pounds |
| 1198-2 | 6 Pounds |
| 1232A | 3 Ounces |
| 1232A-02 | 1 1/2 Ounces |
| 1232A-04 | 4 Ounces |
| 1232A-1 | 1 Quart |
| 1232A-2 | 1 Gallon |

Grease Gun

Part No. 442
Used on Impacts and Tools with greaseable gears



Grease Gun

Part No. 439
Used with impact wrenches and multi-assembly angle tools. For use with grease tube 1232A-04



Grease Nozzle

Part No. 469A
Used with No. 468A grease gun



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

Service

Factory Authorized Service

Sioux Tools has Authorized Service Distributors conveniently located throughout the U.S., Canada and internationally to provide you with service virtually anywhere, anytime. Each is staffed with professional tool repair technicians who know Sioux tools, inside and out, and are able to provide complete and comprehensive repairs.

Each location features the newest in testing and inspection equipment to ensure your tool is repaired and serviced properly...the first time. Every tool that is serviced or repaired is calibrated and tested to the latest standards guaranteeing you the best performance possible.

See inside back cover for a complete listing of Authorized Service Distributors.



Training

To ensure your personnel are knowledgeable about not only Sioux products, but all air tools and products, Sioux Tools conducts training seminars that cover all aspects of the tools we sell. We offer introductory training seminars to help you understand our entire line of tools and their basic operation. Advanced training is tailored to individual needs to help build the skill of an experienced student. In addition, hands-on training is available with particular focus on troubleshooting and repairing.

For additional information on Sioux Tools training seminars, please contact your Sioux Tools Sales Representative.



CONVERSION CHART | SIOUX TOOLS FORCE PRODUCT CATALOG

| INCH | DECIMAL | MILLIMETER | MILLIMETERS | INCHES | MILLIMETERS | INCHES | FOOT POUNDS | NEWTON METERS | FOOT POUNDS | NEWTON METERS |
|-------|---------|------------|-------------|--------|-------------|---------|-------------|---------------|-------------|---------------|
| 1/64 | .0156 | 0.397 | 26 | 1.0236 | 90 | 3.5433 | 10 | 13.5 | 75 | 101.7 |
| 1/32 | .0312 | 0.794 | 27 | 1.0630 | 91 | 3.5827 | 11 | 14.9 | 76 | 103.0 |
| | .0394 | 1.000 | 28 | 1.1024 | 92 | 3.6220 | 12 | 16.3 | 77 | 104.4 |
| 3/64 | .0469 | 1.191 | 29 | 1.1417 | 93 | 3.6614 | 13 | 17.6 | 78 | 105.8 |
| 1/16 | .0625 | 1.587 | 30 | 1.1811 | 94 | 3.7008 | 14 | 18.9 | 79 | 107.1 |
| 5/64 | .0781 | 1.984 | 31 | 1.2205 | 95 | 3.7402 | 15 | 20.3 | 80 | 108.5 |
| | .0787 | 2.000 | 32 | 1.2598 | 96 | 3.7795 | 16 | 21.7 | 81 | 109.8 |
| 3/32 | .0937 | 2.381 | 33 | 1.2992 | 97 | 3.8189 | 17 | 23.0 | 82 | 111.2 |
| 7/64 | .1094 | 2.778 | 34 | 1.3386 | 98 | 3.8583 | 18 | 24.4 | 83 | 112.5 |
| | .1181 | 3.000 | 35 | 1.3780 | 99 | 3.8976 | 19 | 25.8 | 84 | 113.9 |
| 1/8 | .1250 | 3.175 | 36 | 1.4173 | 100 | 3.9370 | 20 | 27.1 | 85 | 115.2 |
| 9/64 | .1406 | 3.572 | 37 | 1.4567 | 110 | 4.3307 | 21 | 28.4 | 86 | 116.6 |
| 5/32 | .1562 | 3.969 | 38 | 1.4961 | 120 | 4.7244 | 22 | 29.8 | 87 | 117.9 |
| | .1575 | 4.000 | 39 | 1.5354 | 130 | 5.1181 | 23 | 31.2 | 88 | 119.3 |
| 11/64 | .1719 | 4.366 | 40 | 1.5748 | 140 | 5.5118 | 24 | 32.5 | 89 | 120.7 |
| 3/16 | .1875 | 4.762 | 41 | 1.6142 | 150 | 5.9055 | 25 | 33.9 | 90 | 122.0 |
| | .1968 | 5.000 | 42 | 1.6535 | 160 | 6.2992 | 26 | 35.3 | 91 | 123.4 |
| 13/64 | .2031 | 5.159 | 43 | 1.6929 | 170 | 6.6929 | 27 | 36.6 | 92 | 124.7 |
| 7/32 | .2187 | 5.556 | 44 | 1.7323 | 180 | 7.0866 | 28 | 38.0 | 93 | 126.0 |
| 15/64 | .2344 | 5.953 | 45 | 1.7717 | 190 | 7.4802 | 29 | 39.3 | 94 | 127.4 |
| | .2362 | 6.000 | 46 | 1.8110 | 200 | 7.8739 | 30 | 40.7 | 95 | 128.8 |
| 1/4 | .2500 | 6.350 | 47 | 1.8504 | 210 | 8.2675 | 31 | 42.0 | 96 | 130.2 |
| 17/64 | .2656 | 6.747 | 48 | 1.8898 | 220 | 8.6611 | 32 | 43.4 | 97 | 131.5 |
| | .2756 | 7.000 | 49 | 1.9291 | 230 | 9.0547 | 33 | 44.7 | 98 | 132.9 |
| 9/32 | .2812 | 7.144 | 50 | 1.9685 | 240 | 9.4483 | 34 | 46.1 | 99 | 134.2 |
| 19/64 | .2969 | 7.541 | 51 | 2.0079 | 250 | 9.8419 | 35 | 47.5 | 100 | 135.6 |
| 5/16 | .3125 | 7.937 | 52 | 2.0472 | 260 | 10.2355 | 36 | 48.8 | 110 | 149.0 |
| | .3150 | 8.000 | 53 | 2.0866 | 270 | 10.6291 | 37 | 50.2 | 115 | 156.0 |
| 21/64 | .3281 | 8.334 | 54 | 2.1260 | 280 | 11.0227 | 38 | 51.5 | 120 | 163.0 |
| 11/32 | .3437 | 8.731 | 55 | 2.1654 | 290 | 11.4163 | 39 | 52.9 | 125 | 170.0 |
| | .3543 | 9.000 | 56 | 2.2047 | 300 | 11.8099 | 40 | 54.2 | 130 | 176.0 |
| 23/64 | .3594 | 9.128 | 57 | 2.2441 | 310 | 12.2035 | 41 | 55.6 | 135 | 183.0 |
| 3/8 | .3750 | 9.525 | 58 | 2.2835 | 320 | 12.5971 | 42 | 56.9 | 140 | 190.0 |
| 25/64 | .3906 | 9.922 | 59 | 2.3228 | 330 | 13.0007 | 43 | 58.3 | 145 | 197.0 |
| | .3937 | 10.000 | 60 | 2.3622 | 340 | 13.4043 | 44 | 59.7 | 150 | 203.0 |
| 13/32 | .4062 | 10.319 | 61 | 2.4016 | 350 | 13.8079 | 45 | 61.0 | 155 | 210.0 |
| 27/64 | .4219 | 10.716 | 62 | 2.4409 | 360 | 14.2115 | 46 | 62.4 | 160 | 217.0 |
| | .4331 | 11.000 | 63 | 2.4803 | 370 | 14.6151 | 47 | 63.7 | 165 | 224.0 |
| 7/16 | .4375 | 11.112 | 64 | 2.5197 | 380 | 15.0187 | 48 | 65.0 | 170 | 231.0 |
| 29/64 | .4531 | 11.509 | 65 | 2.5591 | 390 | 15.4223 | 49 | 66.4 | 175 | 237.0 |
| 15/32 | .4687 | 11.906 | 66 | 2.5984 | 400 | 15.8259 | 50 | 67.8 | 180 | 244.0 |
| | .4724 | 12.000 | 67 | 2.6378 | 410 | 16.2295 | 51 | 69.1 | 185 | 251.0 |
| 31/64 | .4844 | 12.303 | 68 | 2.6772 | 420 | 16.6331 | 52 | 70.5 | 190 | 258.0 |
| 1/2 | .5000 | 12.700 | 69 | 2.7165 | 430 | 17.0367 | 53 | 71.9 | 195 | 264.0 |
| | .5118 | 13.000 | 70 | 2.7559 | 440 | 17.4403 | 54 | 73.2 | 200 | 271.0 |
| 33/64 | .5156 | 13.097 | 71 | 2.7953 | 450 | 17.8439 | 55 | 74.6 | 225 | 305.0 |
| 17/32 | .5312 | 13.494 | 72 | 2.8346 | 460 | 18.2475 | 56 | 75.9 | 250 | 339.0 |
| 35/64 | .5469 | 13.891 | 73 | 2.8740 | 470 | 18.6511 | 57 | 77.3 | 275 | 373.0 |
| | .5512 | 14.000 | 74 | 2.9134 | 480 | 19.0547 | 58 | 78.6 | 300 | 407.0 |
| 9/16 | .5625 | 14.287 | 75 | 2.9528 | 490 | 19.4583 | 59 | 80.0 | 350 | 474.0 |
| 37/64 | .5781 | 14.684 | 76 | 2.9921 | 500 | 19.8619 | 60 | 81.3 | 400 | 542.0 |
| | .5906 | 15.000 | 77 | 3.0315 | 510 | 20.2655 | 61 | 82.7 | | |
| 19/32 | .5937 | 15.081 | 78 | 3.0709 | 520 | 20.6691 | 62 | 84.0 | | |
| 39/64 | .6094 | 15.478 | 79 | 3.1102 | 530 | 21.0727 | 63 | 85.4 | | |
| 5/8 | .6250 | 15.875 | 80 | 3.1496 | 540 | 21.4763 | 64 | 86.8 | | |
| | .6299 | 16.000 | 81 | 3.1890 | 550 | 21.8799 | 65 | 88.1 | | |
| 41/64 | .6406 | 16.272 | 82 | 3.2283 | 560 | 22.2835 | 66 | 89.5 | | |
| 21/32 | .6562 | 16.669 | 83 | 3.2677 | 570 | 22.6871 | 67 | 90.8 | | |
| | .6693 | 17.000 | 84 | 3.3071 | 580 | 23.0907 | 68 | 92.2 | | |
| 43/64 | .6719 | 17.066 | 85 | 3.3465 | 590 | 23.4943 | 69 | 93.5 | | |
| 11/16 | .6875 | 17.462 | 86 | 3.3858 | 600 | 23.8979 | 70 | 94.9 | | |
| 45/64 | .7031 | 17.859 | 87 | 3.4252 | 610 | 24.3015 | 71 | 96.3 | | |
| | .7087 | 18.000 | 88 | 3.4646 | 620 | 24.7051 | 72 | 97.6 | | |
| 23/32 | .7187 | 18.256 | 89 | 3.5039 | 630 | 25.1087 | 73 | 99.0 | | |
| 47/64 | .7344 | 18.653 | | | 640 | 25.5123 | 74 | 100.3 | | |
| | .7480 | 19.000 | | | | | | | | |
| 3/4 | .7500 | 19.050 | | | | | | | | |
| 49/64 | .7656 | 19.447 | | | | | | | | |
| 25/32 | .7812 | 19.844 | | | | | | | | |
| | .7874 | 20.000 | | | | | | | | |
| 51/64 | .7969 | 20.241 | | | | | | | | |
| 13/16 | .8125 | 20.637 | | | | | | | | |
| | .8268 | 21.000 | | | | | | | | |
| 53/64 | .8281 | 21.034 | | | | | | | | |
| 27/32 | .8437 | 21.431 | | | | | | | | |
| 55/64 | .8594 | 21.828 | | | | | | | | |
| | .8661 | 22.000 | | | | | | | | |
| 7/8 | .8750 | 22.225 | | | | | | | | |
| 57/64 | .8906 | 22.622 | | | | | | | | |
| | .9055 | 23.000 | | | | | | | | |
| 29/32 | .9062 | 23.019 | | | | | | | | |
| 59/64 | .9219 | 23.416 | | | | | | | | |
| 15/16 | .9375 | 23.812 | | | | | | | | |
| | .9449 | 24.000 | | | | | | | | |
| 61/64 | .9531 | 24.209 | | | | | | | | |
| 31/32 | .9687 | 24.606 | | | | | | | | |
| | .9843 | 25.000 | | | | | | | | |
| 63/64 | .9844 | 25.003 | | | | | | | | |
| | 1.0000 | 25.400 | | | | | | | | |

HEX SOCKET CONVERSIONS

- 10mm=0.394"
- 11mm=0.433"
- 12mm=0.472"
- 13mm=0.512"
- 14mm=0.551"
- 15mm=0.591"
- 16mm=0.630"
- 17mm=0.669"
- 18mm=0.704"
- 19mm=0.748"
- 20mm=0.787"
- 21mm=0.827"

Inch Lbs. x 0.113=Nm; Nm x 8.849=Inch Lbs.; Ft. Lbs x 1.356=Nm; Nm x 0.737=Ft. Lbs.

U.S. Independent Service Centers

ALABAMA-Birmingham

Tool-Smith Co Inc
1300 Fourth Ave South
35233-2384
205-323-2576
800-317-8665

Birmingham

Motion Industries
1605 Alton Rd
35210
205-951-1134

Dothan

Brackin Wholesale Coatings
725 South Oates St
36301-2557
334-793-4330

Mobile

Tool-Smith Co Inc
920 Lakeside Dr
36693
251-661-0404

Winfield

McCaleb Tool Supply
710 Hwy 43 South
35594
205-487-2222

ARIZONA-Phoenix

Glenn's Tool Service
2149 East Indian School Rd
85016
602-264-6203

Phoenix

UNICOA Industrial Service
2224 N 23rd Ave
85009
520-254-4666

CALIFORNIA-Anaheim

Orange Tool Mart
3051 La Palma Ave
92806
714-237-0080

Fresno

Cal-Weld Supply Co
2701 E Jensen
93706
559-445-0131

Gardena

US Industrial Tool Supply Service
14083 S Normandie Ave
90249
310-327-0465

Montclair

Tools-R-Us
9055 Central Ave
91763
909-626-9500

FLORIDA-Daytona Beach

A A Casey of Daytona Inc
1100 No Nova Rd
32117
386-253-6158

Largo

Nestor Sales/DBA AIM Supply
7337 Bryan Dairy Rd
33777-1507
727-544-6114

Miami

Air/Electric Tool & Equipment
7840 NW 58th St
33166
305-593-5040
800-850-1598

Orlando

Air Products & Equipment Inc
165 Drennen Rd
32806
407-856-7603

Tampa

Gator Repair
5124 Nebraska Ave
33603
813-234-8831

GEORGIA-Tucker

Tool Service Co
Stone Mountain Industrial Park
1810 Auger Dr Units A & B
30084
404-524-4249

Snellville

Kentec Inc
3250 Centerville Hwy
30039
770-985-1907

ILLINOIS-Machesney Park

Engman-Taylor Co Inc
7980 Burden Rd
61115
262-253-8650

Mattoon

S & K Air Power
317 Dewitt Ave E
61938
217-258-8500

INDIANA-Elkhart

ALCO Tool Supply
54847 County Road 17
46515
574-295-5535

Evansville

Lensing Tool & Supply
306 No 7th Ave
47710
812-425-9049

Fort Wayne

Mill Supplies Inc
5105 Industrial Rd
46825
260-484-8566

Indianapolis

Macco Equipment Service
3129 Kentucky Ave
46221
317-248-1444

Indianapolis

Alcorn Industrial Inc
7916 Zionsville Rd
PO Box 68675
46268
317-872-6772

Sioux City

Sioux City Iron Company
310 So Floyd
51101
712-255-7696

LOUISIANA-New Orleans

Beerman Precision Inc
4206 Howard Ave
70125
504-486-9391

MAINE-Portland

M & W Tool Service
38 Portland St
04101
207-772-2057

MASSACHUSETTS-Everett

Panda Electrical Service
165 Main St
02149
617-389-1442

MICHIGAN-Flint

Power Tools & Supply Inc
4182 Pier North Blvd
48504
810-720-3310

Grand Rapids

Neumatic Specialty Inc
O-11319 First Ave NW
Suite B
49544
616-791-9475

Lansing

Power Tools & Supply Inc
4300 Creyts Rd
48917
517-322-0803

Walled Lake

Power Tools & Supply Service
8551 Boulder Court
48390
248-363-5650

Warren

H & P Technologies Inc
21251 Ryan Rd
48091
586-758-0100

MINNESOTA-Minneapolis

Deko Factory Service
3048 Bloomington Ave So
55407
612-721-6651

Minneapolis

Tool Warehouse Inc
3410 East 42nd St
55406-3333
612-722-4260

MISSISSIPPI-Tupelo

Air Power Inc
610 Robert E Lee Dr
38801
662-844-0419
800-824-1006

Tupelo

Compressors & Tools Inc
105 Old Runway Rd
38801
662-844-7023

MISSOURI-Jefferson City

JC Industrial
706 Virginia St
65102
573-636-4171

Kansas City

Clark's Tool
74 NE 69 Hwy
64119
816-452-7873

Lee's Summit

Deco Tool Supply Co
2630 NE Hagen Rd
64064
816-524-6939

St Louis

Authorized Equipment
Service Co
1735 Delmer Blvd
63103
314-772-8024

St Louis

Logan Gresham, LTD
9 S Florissant Rd
63135
314-521-2400

NEBRASKA-Omaha

JDC Tool & Repair
6263 Abbott Dr
68110
402-455-8000

Omaha

Thacker Electric
8517 I Street
68127
402-592-9433
800-678-7604

NEW JERSEY-Hawthorne

Atlantic Tool Systems Inc
170 Fifth Ave
07506
973-238-0009

NEW YORK-Cheektowaga

Air Tool Repair
160 Holtz Drive
14225
716-631-9010

Syracuse

Ace Hydraulic & Pneumatic
6720 VIP Parkway
13211
315-454-8989

U.S. Independent Service Centers

NORTH CAROLINA-Belmont

IDG
2100 The Oaks Parkway
28012
704-398-5600

Charlotte

Air Power Inc
1200-B Upper Asbury Ave
28206
704-334-5913
800-789-9313

High Point

Air Power Sales & Service
1430 Trinity Avenue
27260
336-886-5081
800-334-1001

High Point

High Point Pneumatics
2430 English Rd
27262
336-889-8416

Kernersville

Airand LTD
143B Furlong Ind Dr
27284
336-993-6737

Raleigh

Air Power Inc
2304 Atlantic Ave
27604
800-438-4868

NORTH DAKOTA

West Fargo

Air Tool Service & Supply
127 Main Ave W
58078
701-282-6151

OHIO-Apple Creek

Air Works Service
10680 Dover Rd
44606
330-698-0388

Columbus

Mitchell-McKinney Supply Co
610 Greenlawn Ave
43223
614-444-6732

Youngstown

Power Tool & Supply Company
3699 Leharps Road
44515
330-792-1487

OKLAHOMA-Oklahoma City

Compressed Gas and
Supply Inc
1301 West Reno
73106
405-235-9353

Oklahoma City

Hydraulic Equipment Co
2800 W California Ave, Suite A
73104
405-235-3318
800-249-3318

Tulsa

AOK Dist Corp
4717 So 83rd East Ave
74145
918-627-8116

Tulsa

Tool Center Inc
1447 No Yale
74115
918-838-7411

OREGON-Portland

Charles H Day Co
602 So East 11th
97214
503-232-1659

*** PENNSYLVANIA-Hanover**

C & E Pneumatic Service
301 Poplar St
17331
717-632-5200
800-642-7616

SOUTH CAROLINA-Greenville

Air Power Inc
107 Woodruff Ind Lane
29607
800-922-7321

Winnsboro

JS King Associates
50 Palmetto Place Lane
29180
704-905-2788

TENNESSEE-Bartlett

Pro Power, Inc
7531 Barlett Corporate
Cove E Suite 101
38133
901-383-7888

Chattanooga

Production Tools
2100 So Holtzclaw Ave
37407-5903
423-629-6822

Jackson

Compressors & Tools Inc
129 Anglin Lane
38301
731-421-8306

Johnson City

Summers Hardware &
Supply Co
400 Buffalo St
37604
423-461-4700

La Vergne

Hagemeyer
3101 Centre Pointe Dr
37086-4923
615-287-1200

Memphis

Authorized Equipment Service
812 Polk Ave
38126-4103
901-774-0850
800-238-2529

Nashville

Tool-Smith Service Co Inc
665 Massman Dr
37210
615-883-4833
800-857-6488

Taft

Atlantic Air Tool Co Inc
1112 Old Railroad Bed Rd
38488
931-425-6882

TEXAS-Ft Worth

AETCO
3301 S Grove St
76110
817-921-0231

Grand Prairie

Innovative Tooling Services
2506 West Marshall
75051
972-647-0800

Houston

Houston Tool & Hoist Co
1401 Boyles St
77020
713-674-0912

Houston

Hydraulic Equipment Service
1011 Rothwell St
77002
713-228-9601

Houston

Innovative Tooling
& Accessories
4392 Gessner
77041
972-647-0800

Longview

Texas Air Hydraulic
Service & Supply
251 S Eastmand Rd
75602
903-757-2811

UTAH-Salt Lake City

M & M Tool & Machinery
3362 South Main Street
SLC, UT 84115
801-485-8200

VIRGINIA-Portsmouth

Hydraulic Service Co
3215 Victory Blvd
23702
757-487-2513

Richmond

CH Reed
2519 Grenoble Rd
23294
804-672-6268

Roanoke

Stultz Machine Tools
& Equip Inc
1546 Brownlee Ave SE
24014
540-981-9359
800-542-5747

Salem

Air Power of Virginia Inc
520 Apperson Dr
24153
800-848-1011

WASHINGTON-Seattle

Universal Repair Shop Inc
1611 Bolyston Ave
98122-0049
206-322-2726

Spokane

Edge Construction Supply
E. 1503 Riverside
99202
509-535-9841

WEST VIRGINIA-Beckley

Hughes Supply Co
300 Rural Acres Dr
25801
304-252-1918
304-252-6614

WISCONSIN-Green Bay

Power Tool Service Co
300 North Webster Ave
54301
920-437-2594

Menomonee Falls

Engman-Taylor Co Inc
W142 N9351 Fountain Blvd
53051
800-236-1975

Racine

Machinery & Factory
1021 Sixth St
53403
262-634-3381

* Torque Multiplier Service Center

Canadian Independent Service Centers

ALBERTA-Calgary
Complete Hydraulic Air & Elec
#9 7139 40th Street SE
T2C 2H7
403-720-0445

Edmonton
Quality Tool Repair
11420-156 Street
T5M 3N2
780-702-1686

BRITISH COLUMBIA-Kelowna
KY Tools Sales
Unit 1-1115 Gordon Dr
V1Y 3E3
250-862-2575

MANITOBA-Winnipeg
Accutool Service Center
565 Marjorie Street
R3H 0S8
204-772-6523

Winnipeg
1 Tech Tool Technology
171 Cole Ave
R2L 2C5
204-663-9266

ONTARIO-Burlington
Air Tool Services LTD
920 Brant St Unit 14
L7R 4J1
905-639-5821

London
Pryde Industrial Inc
542 New Bold St
N6E 2S5
519-690-1111

Thunder Bay
Thunder Bay Ind Supply LTD
212 Villa St
P7A 3X9
807-345-1109

Toronto
Grip Clinch Canada
288 Garyray Drive
M9L 1P4
416-742-9161

QUEBEC-Montreal
Instrument Sales & Service
2185 Hampton Ave
H4A 2K5
514-481-8111

Montreal
Dorson LTD
8551 Parkway Blvd
H1J 1N1
514-351-0160

SASKATCHEWAN-Regina
All Tool Repairs
3100 – 12th Ave
S4T 1J7
306-522-7613

Latin America Independent Service Centers

ARGENTINA
Assembly S.R.L.
Brazil 1313 P.B. 4
Capital Federal 1154
Buenos Aires
Argentina
Phone: (54-1) 304-7390

BOLIVIA
Herracruz Importaciones
Av. Roca Y Coronado # 295
Santa Cruz de La Sierre
Bolivia
Phone: (591) 335-41073

BRAZIL
Sebra
Snap-on-Latin
American/Caribbean Division
Rua Juscelino Kubitscheck de
Oliveira 470
Distrito Industrial II
Santa Barbara D´ Oeste
CEP 13456-401 SP
Brazil
Phone: (55-19) 3185-1800

CHILE
Perfect Technology Chile S.A.
Av. Americo Vespucio
Norte 2880, Of 505
El Cortijo, Conchali
Santiago
Chile
Phone: (56-2) 948-7075

COLUMBIA
Dishegro
Diagonal 15 # 22- 18
Bogota
Colombia
Phone: (57- 1) 360-5967

Servitools LTDA
Carrera 58 No 14 – 14,
Zona Industrial Puente
Bogota
Colombia
Phone: (57-1) 420-3599

ECUADOR
Castillo Hermanos S.A.
Panamericana Norte KM 5.5
13135 Y Los
Quito
Ecuador
Phone: (593-92) 247-7214

Najomez
Mosquera Narvaez 746 y
Carvajal
Quito
Ecuador
Phone: (593- 2) 2526-897

HONDURAS
Herramientas la Atlantica
2da. Calle, 17 Ave. N.E.
Col. Universal
Carretera Vieja a La Lima
San Pedro Sula
Honduras
Phone: (504) 557-6294

MEXICO
RC Maquinarias S.A. de CV
Calzada Ignacio Zaragoza
N° 377
Col. San Pedro
Puebla, Pue
Mexico
Phone: (52-222) 222-2587

RC Maquinarias S.A. de CV
Subsidiary
Calle Diego Rivera N° 39
Privada Diego Rivera
Col. Los Alcanfores C.P. 76150
Queretaro, Que
Mexico
Phone: (52-442) 217-7435

Snap-on Sun De Mexico,
S.A. de C.V.
Av Gustavo Baz, No. 166B,
Colonia La Escuela
Tlanepantla, Edo de Mexico
Mexico 54090
Phone: (52-55) 5010-3000
www.snapon.com.mx

NICARAGUA
Sistemas de
Seguridad Buhler S.A.
Contiguo donde fue
Cine Dorado
Bolonía, Managua
Nicaragua
Phone: (505) 2222-6833

PARAGUAY
H. Petersen
Av. Artigas 1552
Asuncion
Paraguay
Phone: (595-21) 202-615

PERU
Energotec S.A.
Calle Los Plasticos 204
Ate- Lima 3
Peru
Phone: (51-1) 348-7570

Igardi Herramientas S.A.
Av. Jaview Prado (FSTE) # 1131
Lima
Peru
Phone: (30-5) 887-3533

VENEZUELA
Refiteca
Calle E. Boleita Norte
Edificio Alexandro
Local A. Semisotano
Caracas
Venezuela
Phone: (58-212) 235-8042

Hermaco
Av. Intercomunal N° 428
Ciudad Ojeda
Estado Zulia
Venezuela
Phone: (58-65) 260-994

United Kingdom Independent Service Center

UK
Snap-on Tools LTD Repair
Centre
Telford Way Industrial Estate
Kettering, Northants
NN168 PU, Great Britain
Phone: 011-44-1536-413903

NOTES

Lined area for writing notes, consisting of multiple horizontal blue lines.



250 Snap-on Drive
P.O. Box 1596
Murphy, North Carolina USA 28906
PH: 828.835.9765
FAX: 828.835.9685
TOLL FREE: 866.259.7291
TOLL FREE FAX: 800.722.7236

Benelux
Tel.: (N) 31 (0) 20 568 26 64
(B) 32 (0) 14 23 19 67
Fax: (N) 31 (0) 20 568 26 60
(B) 32 (0) 14 23 26 27
e-mail: snap@snap-on.nl

Latin America
Tel.: 305-271-0944
Fax: 305-271-7152
e-mail: latinamerica.caribbean@snapon.com

Germany
Tel.: 49 2104 9509-0
Fax: 49 2104 9509-99
e-mail: snapon.industrial@snapon.com

Italy
Tel.: 00 39 02 66 04 53 70
Fax: 00 39 02 61 29 78 15
e-mail: indus.italia@snapon.com

United Kingdom
Tel.: 44 (0) 1536-413904
Fax: 44 (0) 1536-413874
e-mail: industrialuk@snapon.com

Asia
Tel.: 65-6451-5570
Fax: 65-6451-5574
email: esales.sg@snapon.com

Australia
Tel.: 61 (0)2 9837 9100
Fax: 61 (0)2 9624 2578
e-mail: SOTA.customerservice@snapon.com



FORM# ZML0031
PRINTED IN USA
07/09 10M

 www.siouxtools.com